

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A61F 13/00, 13/15</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/09013</p> <p>(43) International Publication Date: 13 March 1997 (13.03.97)</p>
<p>(21) International Application Number: PCT/US96/13795</p> <p>(22) International Filing Date: 27 August 1996 (27.08.96)</p> <p>(30) Priority Data: 08/522,600 1 September 1995 (01.09.95) US</p> <p>(71) Applicant: McNEIL-PPC, INC. [US/US]; Grandview Road, Skillman, NJ 08558 (US).</p> <p>(72) Inventors: ROLLER, Judith, E.; 9 Quince Place, North Brunswick, NJ 08902 (US). LUCHINO, Thomas, Patrick; 201 Stirrup Drive, Freehold, NJ 07728 (US). BURWELL, David, A.; 344 Hopewell-Amwell Road, Hopewell, NJ 08525 (US). PARGASS, Sunita; Apartment EE822, 100 City Avenue, Wynnwood, PA 19096 (US).</p> <p>(74) Agents: CIAMPORCERO, Audley, A., Jr. et al.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: APERTURED FILM HAVING IMPROVED FLUID DISTRIBUTION PROPERTIES, METHOD OF FORMING SAME, AND ABSORBENT PRODUCTS INCORPORATING SAME</p>		
<p>(57) Abstract</p> <p>An apertured film for use as a topsheet in absorbent products wherein the film is corona treated on one side, and has received a surfactant application that is distributed to both the corona treated and non-corona treated sides of the film. A method for application of surfactant includes applying the surfactant to one side of the film and rolling the film into a roll while the surfactant is still wet in order to apply surfactant to both sides of the film.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

- 1 -

**APERTURED FILM HAVING IMPROVED FLUID
DISTRIBUTION PROPERTIES, METHOD OF FORMING SAME,
AND ABSORBENT PRODUCTS INCORPORATING SAME**

5 **Field Of The Invention**

This invention relates to apertured films having primary utility as a cover member for an absorbent article, and to methods and apparatus for forming such apertured films.

10 **Background Of The Invention**

For many years it has been common to use nonwoven fabrics as a cover member, or facing layer, for products that are adapted to receive body discharges, such as disposable diapers, sanitary napkins, adult incontinent devices, wound dressings and the like. Such fabrics have typically been formed by air-laying, carding, spun bonding and the like, and it is known to post-treat such fabrics to provide strength and integrity, as by the application of binders or fiber entanglement, either mechanically or by the application of fluid forces. Since such fabrics are often formed of hydrophobic material, it is also known to post-treat such fabrics with surface active agents to promote the passage of body discharges through the fabric. Such fabrics have, or are perceived to have, desirable characteristics such as breathability, drapeability, softness, and pleasant hand and tactile impression.

One of the drawbacks associated with facing layers formed of a nonwoven fabric is that liquid, such as urine, menses, wound exudate, and the like, that passes through the facing layer and into the absorbent core has a tendency to strike back through the facing layer, particularly under pressure and when the liquid in the absorbent core approaches the volumetric storage capacity of the core. For this reason, and other reasons, it has been known in the past to utilize apertured plastic films as the facing layer in absorbent articles.

- 2 -

The following list includes disclosures of such apertured films in issued U.S. and foreign patents and published patent applications.

- 5 U.S. Patent No. 3,632,269 - Doviak et al.
U.S. Patent No. 3,929,135 - Thompson et al.
U.S. Patent No. 4,324,276 - Mullane
U.S. Patent No. 4,351,784 - Thomas et al.
U.S. Patent No. 4,381,326 - Kelly
U.S. Patent No. 4,456,570 - Thomas et al.
U.S. Patent No. 4,535,020 - Thomas et al.
10 U.S. Patent No. 4,690,679 - Mattingly et al.
U.S. Patent No. 4,839,216 - Curro et al.
U.S. Patent No. 4,950,264 - Osborn
U.S. Patent No. 5,009,653 - Osborn
U.S. Patent No. 5,112,690 - Cohen et al.
15 U.S. Patent No. 5,342,334 - Thompson et al.
U.S. Patent No. 5,352,217 - Curro
U.S. Patent No. 5,368,910 - Langdon
U.S. Patent No. 5,368,926 - Thompson et al.
U.S. Patent No. 5,376,439 - Hodgson et al.
20 U.S. Patent No. 5,382,245 - Thompson et al.
U.S. Patent No. 5,382,703 - Nohr et al.
U.S. Patent No. 5,383,870 - Takai et al.
U.S. Patent No. 5,387,209 - Yamamoto et al.
EP 0 304 617 - Suda et al.
25 EP 0 432 882 A2 - Shipley
EP 0 598 204 A1 - Garavaglia et al.
EP 0 626 158 A1 - Coles et al.
EP 0 626 159 A1 - Taki et al.
30 EP 0 640 328 - Tanaka et al.

- 3 -

JP 3-286762 A - Yamamoto et al.

WO 92/18078 A1 - Colbert

WO 93/15701 A1 - Turi et al.

WO 94/18926 A1 - Perry

5 WO 94/22408 A1 - Langdon

WO 94/28846 A1 - Steiger et al.

WO 95/00093 A2 - Osborn et al.

While certain of such apertured films have functioned reasonably well for their intended purposes, the vast majority of such films have actual and perceived major deficiencies. For example, even though such apertured films may permit fluid to readily pass therethrough, and may minimize strike-back of such fluid, such apertured films nevertheless tend to have the appearance, feel and hand of a film, rather than a fabric. Such film-like characteristics are considered as a negative by the consumer, and thus absorbent products with apertured films as a facing layer have not met with widespread consumer acceptance.

Major improvements for apertured film facing layers for absorbent products are disclosed in commonly assigned, copending U.S. patent application Serial Nos. 08/417,404 and 08/417,408 to Turi et al. filed April 5, 1995 as a continuation and a division of Serial No. 08/004,379, filed January 14, 1993 as a continuation of Serial No. 07/744,744, filed August 14, 1991 (corresponding to publication WO 93/15701 A1 on the above list). In the above-mentioned Turi et al. applications, an apertured film, and methods and apparatus for forming the film, are disclosed which impart to the film physical characteristics like those of nonwoven fabrics. This is accomplished by supporting a film formed of stretchable thermoplastic polymeric material on localized support regions of a backing member, and directing a fluid in the form of high pressure, small diameter columnar jets against the upper surface of the film, so that unsupported portions of the film

- 4 -

are directed downwardly between the support regions to cause the formation of micro-holes and fiber-like elements (fibrils) thereabout to impart to the apertured film physical characteristics of appearance, softness, feel and hand, like those of a nonwoven fabric. While such apertured films are a marked improvement over prior art apertured films, it is desired to provide further improvements in such apertured films, as by improving the ability of such films to pass viscous fluids, such as menses, and as by improving the ability of such films to wick or transport liquid through the thickness of the film (in the z-direction), and to then wick liquid away (in the x and y direction, particularly on the underside of the film, that is, the side of the film facing the absorbent core) from an initially wetted zone so as to promote more efficient utilization of the absorbent capacity of the entire absorbent core.

For use of apertured films as topsheets for sanitary napkins, clean-dry properties are very much desired. This means that the sanitary napkin should appear clean and dry to the user even after it has accepted a flow of menstrual fluid. There are many factors affecting the clean-dry properties of a sanitary napkin, including the aperture characteristics and open area of the napkin cover material. There is a trade-off in the effects of the film aperture size and open area on clean-dry properties. On the one hand, large apertures allow the fluid to be more rapidly transmitted to the absorbent core. On the other hand, apertures that are too large permit the fluid to be transported back through the topsheet from the absorbent core (a phenomenon sometimes referred to as "strike back") and to contact the wearer. Furthermore, large open areas tend to allow the stain on the absorbent core of the napkin to be visible through the topsheet and give the wearer the perception that the product has not kept her clean. To exhibit both clean and dry properties, a topsheet must have a carefully balanced combination of aperture size and open area: large enough apertures to rapidly accept a flow of menstrual fluid and to allow it to pass through to the

- 5 -

napkin's absorbent core, but small enough to mask the stain on the underlying absorbent core to give the wearer the perception of cleanliness.

Summary Of The Invention

5 In accordance with one aspect of the present invention, apertured films of the type disclosed in the above-mentioned Turi et al. patent applications are improved by providing such films with larger apertures and sufficient open area so that viscous fluids, such as menses, can flow readily through the film. These improved properties are imparted to the film by
10 subjecting the film to fluid forces in the form of columnar streams or jets from at least two sets of orifices, the orifices of one set having a diameter greater than ten mils, and the fluid supplied to the orifices having a relatively low pressure less than about 500 psig, and the orifices of at least one other set having a diameter of less than or equal to ten mils and the fluid supplied
15 thereto having a relatively high pressure greater than about 500 psig. The present invention can be practiced with selective variation of the sequence to which the film is subjected to fluid forces from the low and high pressure orifices, that is, first low pressure then high pressure, or first high pressure then low pressure, or other combinations or variations.

20 The apertures are, for the most part, irregular in shape and size. They are measured by various techniques that approximate the diameter, which may be expressed as equivalent hydraulic diameter (EHD) or equivalent circular diameter (ECD). The resulting apertured film has a combination of large sized apertures having average EHD's of from about 7
25 mils to about 30 mils, and small sized apertures having average EHD's from about 1 mil to about 7 mils. Such apertured films have an open area in the range of from about 3% to about 13%.

 The improved apertured film of the present invention is preferably formed on a backing member like that shown in Figures 17-19 of

the above-mentioned Turi et al. applications, which results in the film having a series of generally parallel ridges formed by generally vertically oriented side walls which define a series of generally parallel valleys. The film thus includes generally parallel alternating solid or closed portions of the film separated by apertured or open portions of the film, that contain the aforementioned combination of large and small sized apertures. Both size apertures are formed as a result of elongating and drawing the stretchable material between the localized support regions of the backing member as a result of the application of fluid pressure, and as the film elongates it undergoes thinning until it finally reaches the point of rupturing (i.e., splitting and fibrillating) to form the above-mentioned apertures.

As with apertured films disclosed in the Turi et al. applications, the apertures are surrounded by a network of fiber-like elements or microstrips of drawn plastic material. Such drawn fiber-like elements (fibrils) cooperate with the apertures to provide the apertured film with physical characteristics similar to those of nonwoven fabrics. The fiber like elements have lengths varying from about 0.005 inch (0.013 cm) to about 0.05 inch (0.127 cm), widths ranging from about 0.001 inch (0.003 cm) to about 0.035 inch (0.089 cm), and thicknesses ranging from about 0.00025 inch (0.0006 cm) to about 0.002 inch (0.005 cm).

In accordance with the present invention, apertured films of the type disclosed in the above mentioned Turi et al. applications, and of the improved type disclosed and claimed in commonly assigned, concurrently filed, U.S. patent application Serial No. _____ entitled "Method Of Forming Improved Apertured Films, Resultant Apertured Films, And Absorbent Products Incorporating Resultant Apertured Films" (Attorney Docket CHI-838) are modified so as to provide the film with improved fluid distribution properties in the regions of the film which have been subjected to

- 7 -

stretching, by downward deflection of the film into the recessed regions of the support member, during formation of the film.

In accordance with the present invention, the apertured film is formed from a pre-embossed starting film having a female side with
5 observable cupped recesses and a male side with observable protrusions, the male side being smoother than the female side. Preferably, one side of the film is corona discharge treated, and the treated side is disposed against the support regions of the backing member. Following aperturing in accordance with the teachings of the above-mentioned commonly-assigned, concurrently
10 filed U.S. Patent Application Serial No. _____ (Attorney Docket CHI-838), in one embodiment of the present invention, the corona treatment is on the male side of the film and the treated side is disposed against the support regions of the forming member. A surface active agent, i.e., a "surfactant" in a water-based solution is applied to the female side of the film and the film
15 is rolled up so that surfactant is transferred from the female side of the film to the male side thereof. In accordance with another embodiment of the invention, the corona treated male side of the film is disposed against the support regions of the forming member, and following aperturing, surfactant is applied directly on the male side of the apertured film. In both
20 embodiments, the resultant film is used with the corona-treated side facing the absorbent core of an associated absorbent article. It is preferred to have more surfactant on the corona-treated male side of the film to provide a gradient which enhances z-direction flow of liquid through the film, and which enhances x-y direction flow of liquid on the underside of the film.

25 These embodiments not only provide for efficient manufacture, but also result in a film having improved fluid distribution properties. In this regard, the resulting film also provides a wicking mechanism for spreading fluid in the x-y direction of the film on the side adjacent the absorbent core, which promotes more effective use of the absorbent core.

- 8 -

The method for forming an apertured film from a stretchable thermoplastic polymeric material in accordance with the present invention comprises the steps of providing an embossed starting film comprising stretchable thermoplastic polymeric material having an upper side and a lower corona discharge treated side. The method further comprises providing a backing member comprising localized support regions for supporting the starting film, recessed zones into which the film may be deformed by the application thereto of fluids, and means for allowing the applied fluid to be transported away from the backing member.

The starting film is supported on the backing member with portions of the lower side of the film being in contact with the support regions of the backing member and with the upper side of the film facing away from the backing member. The method further comprises directing a fluid in the form of columnar streams from at least two sets of orifices against the upper side of the starting film in a zone of contact, i.e., a zone in which the film is subjected to the forces from the fluid streams. The orifices of the first set each have a diameter greater than ten mils and the fluid supplied thereto has a pressure less than 500 psig. to cause the formation of large sized holes in the starting film. The orifices of the second set each have a diameter less than or equal to ten mils and the fluid supplied thereto has a pressure of at least 500 psig. to cause the formation of micro-holes in the starting film, whereby a combination of large sized and micro-holes are formed in the starting film.

The present method further comprises moving the film from the contact zone, coating the upper side of the apertured film with a surface active agent, and winding the apertured film into a roll with the lower and upper sides being in surface-to-surface contact. By this surface-to-surface contact, at least a portion of the surface active agent is transferred from the upper side of the film to the lower side thereof.

- 9 -

Other features and advantages of the present invention will become readily apparent from the following detailed description, the accompanying drawings, and the appended claims.

5 Brief Description Of The Drawings

FIG. 1 is a schematic side elevational view of a production line for forming apertured film in accordance with the present invention;

10 FIG. 2 is a schematic side elevational view, on an enlarged scale, of the unwind section of the apparatus for producing the apertured film of the present invention;

FIG. 3 is an enlarged side elevational view of the aperturing section of the apparatus used to form the apertured film of the present invention;

15 FIG. 4 is an enlarged side elevational view of the dewatering section of the apparatus used to form the apertured film of the present invention;

FIG. 5 is an enlarged side elevational view of the drying section of the apparatus used to form the apertured film of the present invention;

20 FIG. 6 is an enlarged side elevational view of the slitter/rewinder section of the apparatus used to form the apertured film of the present invention;

FIG. 7A is a schematic view of a orifice strip used in the apparatus to form one of the apertured films of the present invention;

25 FIGS. 7B, C, D and E are enlarged views of orifice patterns which can be used in the apparatus to form the apertured films of the present invention;

- 10 -

FIG. 8 is an exploded perspective view of a starting film positioned on a backing member for processing in accordance with the present invention;

5 FIG. 9 is a top plan view of the backing member shown in the lower portion of FIG. 8;

FIG. 10 is an enlarged cross-sectional view taken along line 10-10 of FIG. 9;

10 FIGS. 11A-D are views similar to FIG. 10 showing sequential stages in the drawing of the starting film to form apertures in accordance with the teachings of the present invention;

FIG. 12 is a photograph in top plan of an apertured film formed at a magnification of 7.5 times;

FIG. 13 is an end elevational view of the apertured film of FIG. 12;

15 FIG. 14 is an end elevational view of the apertured film of FIG. 13 at a magnification of 15 times;

FIG. 15 is a top plan view of another apertured film at a magnification of 7.5 times;

20 FIG. 16 is an end elevational view of the apertured film of FIG. 15;

FIG. 17 is an end elevational view of the apertured film of FIG. 15 at a magnification of 15 times;

25 FIGS. 18A and B are photographs taken at a magnification of 10 X of apertured film formed in accordance with the invention, formed from an embossed starting film with the male side thereof against the associated forming member, wherein FIG. 18A is the side thereof against which water jets were directed, and FIG. 18B is the side thereof positioned against the associated forming member;

- 11 -

FIG. 19 is a block diagram showing the various steps of the process for producing the apertured film in accordance with the present invention;

5 FIG. 20 is a perspective view of a sanitary napkin comprised of an apertured film according to the present invention; and

FIG. 21 is a view, in section, taken along line 21-21 of FIG. 20;

10 FIG. 22 is a graph depicting aperture size distribution in a sample of apertured film made at 875 psig. on an apparatus using three orifice strips each having a plurality of orifices, all of the orifices being 5 mils in diameter, said orifice strip being shown in FIG. 7A;

15 FIG. 23 is a graph depicting aperture size distribution in a sample of apertured film made on an apparatus comprising a single orifice strip having a plurality of orifices each 20 mils in diameter, said orifice strip being shown in FIG. 7C;

20 FIG. 24 is a graph depicting aperture size distribution in a sample of apertured film made on an apparatus comprising a first orifice strip (shown in FIG. 7C) having a plurality of orifices, all of which have a diameter of 20 mils, and a second orifice strip (shown in FIG. 7A), downstream of the first strip, wherein the second strip has a plurality of orifices all of which have a diameter of 5 mils;

FIG. 25 is a graph depicting aperture size distribution in a sample of apertured film made in accordance with the invention; and

25 FIG. 26 is a graph depicting the results of comparison in which the spacing of the orifices comprising the orifice strip is varied.

Description Of The Preferred Embodiments

While the present invention is susceptible of embodiment in various forms, there is shown in the drawings and will hereinafter be

described presently preferred embodiments, with the understanding that the present disclosure is to be considered as an exemplification of the invention, and is not intended to limit the invention to the specific embodiments illustrated.

5 Referring now to the drawings, FIG. 1 is a schematic, side elevational view of one embodiment of a production line that may be utilized to produce apertured films in accordance with the teachings of the present invention. As is indicated by the direction arrow, the process flow proceeds from right to left in FIG. 1. As is shown in FIG. 1, the production line has
10 five major stations; a film unwinding station 30, an aperturing station 40, a dewatering station 50, a drying station 60, and a slitting, rewinding, and surfactant application station 70.

As shown in FIG. 2 in the film unwinding station, two rolls 31
15 of starting film material 33 are mounted for rotation on frame F. The film from rolls 31 is fed over guide rollers and into festoon 32 which has an automatic (closed loop) tension control system. Film 33, under suitable tension, e.g., between 0.1 to 1 pound per linear inch, emerges from festoon 32, and proceeds to the aperturing station 40.

20 While many different starting film materials are suitable for use in the present invention, one of the preferred materials is a polyethylene film commercially available from Exxon Chemical under product designation EMB-631. This film is an embossed, white pigmented polyethylene film. The polyethylene component consists of a blend of 40% by weight low density polyethylene and 60% by weight linear low density polyethylene.
25 The film has 6.5% by weight titanium dioxide.

The starting film is embossed with a diamond pattern at 165
lines per inch to provide on one side of the film, referred to as the male side, a plurality of discontinuous observable protrusions separated by a continuous, interconnected grooved pattern. The other side of the embossed starting film,
30

referred to as the female side, has a plurality of observable, cupped recesses separated by a continuous, interconnected rib pattern. The cupped recesses in the female side of the film are in respective registration with the protrusions on the male side of the film. The starting film is electrostatically treated with a corona discharge treatment on one side, preferably the male side. The film has an ultimate tensile strength of 1750 grams in the machine direction (with 500% elongation at break), and 1300 grams in the cross direction (with 650% elongation at break), as determined using ASTM test D-882.

The process for making the film of the invention may be either batch or continuous, generally similar to the batch and continuous processes disclosed in co-pending Serial No. 08/417,404. The preferred embodiment is a continuous apparatus, as further disclosed herein.

With reference to FIG. 3, the film 33 from the unwind station is shown entering aperturing station 40 at the right hand side thereof. Aperturing station 40 includes a honeycomb-type support drum 41 rotatably mounted on a frame F1. The drum 41 has a three-dimensional backing or forming member, described in detail hereinafter, mounted on its outer peripheral surface. Four water jet manifolds 42 are also supported on frame F1 and four suction slots, one for each manifold 42, are provided interiorly of the support drum, as is also hereinafter described in detail. The suction slots are mounted within the drum and are aligned with the water jet manifolds located outside of the drum. Each water jet manifold comprises a metallic strip, hereinafter sometimes referred to as an orifice strip, having a plurality of orifices having predetermined size and spacing. Specific examples of such orifice strips are described in more detail hereinafter. A given manifold 42 may comprise one or more orifice strips. The orifice size preferably remains constant for each strip. However, the orifice size may vary on a given strip. The distance between the lower surface of the orifice

- 14 -

strip and the outer surface of the backing member of the aperturing drum is preferably in the range of between 0.50 to 1.0 inches.

Hot water under pressure is pumped to the manifolds 42, and the pressurized water exits through the plurality of orifices in the orifice strip in the form of columnar water jets. The water pressure in each manifold 42 may be separately regulated. The entering film 33 is trained over a guide roller 43, and then over the outer periphery of the three dimensional forming member mounted over the support drum 41, with the male side of the film being disposed against the forming member. The columnar streams of water exiting the orifice strips impinge on the film and cause the film to deflect downwardly into the recessed regions of the backing member mounted on the support drum, thereby causing the film to stretch and rupture into a multiplicity of irregular size holes. The now-apertured film 44 emerges from aperturing station 40 at the left-hand side thereof and passes to dewatering section 50.

As is shown in FIG. 4, in the dewatering section 50, two dewatering drums 51 are mounted for rotation on frame F3. Drums 51 have a honeycomb configuration, and each drum has two vacuum slots associated therewith, capable of drawing vacuum up to 7 inches Hg. Twelve air knives 52 are provided, six air knives being provided for each drum 51. The suction slots associated with the dewatering drums 51 are located internally of the drums, whereas air knives 52 are located outside of the drums 51. Excess water is removed from the apertured film by the impingement of high velocity air from knives 52 and by suction through the suction slots in drums 51. Air knives 52 operate at an air temperature range between about 150°-180° F. Total air flow through the twelve air knives 52 is between about 1,000 to about 2,000 cubic feet per minute per linear foot of apertured film width. The dewatered film 53 emerges from the dewatering station 50, at the left-hand side thereof, and passes to the drying section.

- 15 -

With reference to FIG. 5, the air drying station 60 is illustrated as including two vacuum drums 61 mounted on frame F4. Each drum 61 has a suction slot, which has an arc of 300° around the drum. Twenty air knives 62 are positioned outwardly of each vacuum drum 61 and the air knives 62 operate at a temperature between 150°-180° F. The combined air flow for all forty air knives 62 is between about 5,000 to about 7,000 cfm per linear foot of apertured film width. The pressure drop caused by the vacuum in drums 61 is about 2 inches of water measured across the film. The dried film 63 emerges from drying section 60 at the left-hand side thereof and passes to slit/rewind section 70.

Referring now to FIG. 6, the film 63 from the drying section enters the slit/rewind station 70 at the right hand side thereof. A slitter 71, consisting of spaced score cut type slitting knives, cuts the dried apertured film to the desired width. The dried and slit apertured film then passes to a surfactant applicator 72, where a suitable surfactant, e.g., Tween 20, is applied to the film by kiss-coating. The surfactant is preferably provided in an aqueous solution consisting of about 48.8 ± 1.5 percent surfactant. In an exemplary embodiment of the invention, the surfactant roller coating speed is 15 ± 3 inches per minute. Preferably, the surfactant is applied to the female side of the film. Alternatively, the surfactant can be applied to the male side of the film, or to both sides of the film. The above-mentioned parameters result in a surfactant solution add-on of $0.25 \text{ mg/in}^2 \pm 0.07$. The surfactant coated slit apertured film, while still wet, then passes to a center driven rewind unit 73 mounted on frame F5 where the coated slit apertured film is wound into a roll.

When the film is wound into a roll, the male and female sides of the film come into contact with each other. The surfactant on one side is still wet when the film is wound into a roll, and some of the surfactant transfers to the other side of the film to which surfactant has not been

- 16 -

5 applied. It is believed that when the surfactant is initially applied to the side of the film that is not corona treated (with no surfactant being applied directly to the corona treated side), approximately 65% or more of such applied surfactant transfers to the corona treated side of the film when the film is wound into a roll. It is believed that when the surfactant is initially applied to the corona treated side of the film (with no surfactant being directly applied to the non-corona treated side), approximately 25% or less of the applied surfactant transfers to the side of the film that is not corona treated when the film is wound into roll. Therefore, regardless of which side initially receives the surfactant application, a transfer of surfactant from one side to the other occurs when the film is wound into a roll, and the surfactant is distributed between the corona treated and non-corona treated sides such that the corona treated side retains approximately 65-75% or more, and the non-corona treated side retains approximately 25-35% or less, of the surfactant. The resulting apertured film material has a wettability gradient between the corona treated side and the non-corona treated side.

Testing of distilled water contact angles in Exxon EMB-631 film with male side corona treatment (unapertured) has resulted in a contact angle on the female side of 78 degrees when the surfactant was initially applied to the male side, and 76 degrees when the surfactant was initially applied to the female side. In both cases, the surfactant was applied in the manner in which it was applied to an apertured film, and the film was rolled up after application of the surfactant solution while the film was still wet. Transfer of the solution from the side on which it was initially applied to the opposite side of the film was as described above (i.e., approximately 65-75% of the surfactant was retained by the corona-treated side). The measured contact angle on the male side in both cases was zero degrees (0°). When no surfactant was applied, the contact angle was 102 degrees on the female side and 72 degrees on the male side. See Table 9 below.

- 17 -

Since the contact angle is an indicator of the wettability of the surface (with a lower contact angle indicating a higher degree of wettability), it is believed that a gradient in contact angle from the non-corona treated side to the corona treated side, as discussed above, facilitates the ability of the apertured film material to draw liquid from the non-corona treated side to the corona treated side. Further, it is believed that the reduction in contact angle to zero degrees (0°) on the corona treated side, which, in the absorbent articles of the present invention, is the side that normally faces the absorbent core of an absorbent article (such as a sanitary napkin) facilitates wicking for the spreading fluid in the x-y direction along the surface of the film that faces the absorbent core.

In prior art apertured films, it has been desirable to apply surfactant only to the side of the film facing the skin of the user of the absorbent article. The application of surfactant on the body facing side of the film facilitates the spreading of liquid on the body facing side of the film, and thereby increases absorption through the film and into the absorbent core. Further, the application of surfactant on the body side of the film provides a better tactile feeling for the user. A film processed according to the above method, wherein surfactant is distributed on both the body facing side and the absorbent core facing side of the apertured film, has not heretofore been thought to be desirable. Therefore, the film of the present invention has been found to have surprising, unexpected results regarding the ability of the apertured film to draw liquid from the body side to the absorbent side. See discussion regarding Tables 11-14 below.

Referring to FIGS. 7A-7E, the columnar jets of water are discharged from one or more orifice strips having a plurality of orifices. Preferably, the orifices are formed by drilling a precursor metallic strip to form cylindrical holes. However, it is anticipated that holes of various shapes may be used.

FIG. 7A shows an orifice strip 80 for delivering columnar jets of water each having a relatively small cross-section to form micro-holes in the film. The orifices 82 in the manifold have a diameter of 5 mils (.005 inch), and are spaced .020 inch apart. This manifold strip is available from the Nippon Nozzle Co., of Kobe, Japan.

FIGS. 7B-7E show orifice strips for producing columnar jets of water, each having a relatively large cross section, to form large sized holes in the film. FIG. 7B shows an orifice strip having two rows 84, 86 of orifices 84', 86' that are spaced apart on opposite sides of a center tangent line. The orifices in each row have a diameter of 15 mils (.015 inch), and are spaced .022 inch apart, center-to-center. The spacing of the orifices in the top row is offset from the spacing of the orifices in the bottom row by .011 inch. The strip contains 90.9 orifices per inch.

FIG. 7C shows an orifice strip having two rows 88, 90 of orifices 88', 90' that are spaced apart on opposite sides of a center tangent line. The orifices in each row have a diameter of 20 mils (.020 inch), and are spaced .032 inch apart. The spacing of the orifices in the top row is offset from the spacing of the orifices in the bottom row by .016 inch. The strip contains 62.5 orifices per inch.

FIG. 7D shows an orifice strip having two rows 92, 94 of orifices 92', 94' that are spaced apart on opposite sides of a center tangent line. The orifices in each row have a diameter of 25 mils (.025 inch), and are spaced .038 inch apart. The spacing of the orifices in the top row is offset from the spacing of the orifices in the bottom row by .019 inch. The strip contains 52.6 orifices per inch.

FIG. 7E shows an orifice strip for delivering columnar jets of water each having a relatively large cross-section for forming large sized holes in film. The orifices each have a diameter of 0.025 inches, and are spaced 0.083 inches, center-to-center. While the orifice strip shown in FIG.

7E is suitable for forming film in accordance with the present invention, use of orifice strips such as shown in FIG. 7B-7D is presently preferred for use in combination with one or more orifice strips having relatively small orifices for formation of micro-sized holes.

5 The small orifices (see FIG. 7A) preferably have a diameter under 10 mils. The larger orifices (see FIGS. 7B-7E) preferably have a diameter greater than 10 mils.

10 An apparatus for making apertured films of the present invention is described in detail in co-pending patent application Serial No. 08/417,404. The apparatus for making the film of the present invention contains certain additional features, including a second set of orifice strips as discussed above with reference to FIGS. 7B-7E. The pressure of the water delivered to the small orifices is generally greater than 500 psig, preferably on the order of 500-1600 psig or higher. The pressure of water delivered to
15 the large orifices is generally less than 500 psig, preferably on the order of 125-200 psig.

20 In a preferred embodiment, the aperturing equipment consists of a honeycomb type support drum, a three dimensional forming member, several water jet manifolds, and corresponding suction slots arranged interiorly of and sequentially along a section of the circumference of the drum. The forming member is an engraved sleeve, as shown in FIGS. 8-10, which is mounted onto the honeycomb support drum. The suction slots are mounted within the drum and they are lined up with the water jet manifolds located outside the drum. Each water jet manifold contains a metallic strip
25 having a plurality of orifices. For a given manifold, the orifice size remains constant throughout the strip. The distance between the orifice strip and the surface of the engraved sleeve is preferably between 0.50 to 1 inch. The manifolds are pressurized by pumping in heated water. The pressurized water exits through the series of orifices in the orifice strip, thus creating

- 20 -

substantially columnar water jets. The energy of the columnar hot water jets impinging on the film causes the film to contour toward the surface of the engraved sleeve, thereby causing the film to stretch and rupture into a multiplicity of irregular size holes. The pressure and temperature of the water supplied to each manifold may be separately regulated. The process parameters are as follows:

Line Speed (yards/min): 50-200

Water Temperature: 155° - 165° F.

Maximum Number of Manifolds Used: 3

Distance between Manifold Strip and Surface of Sleeve: 0.50" - 1"

Low Pressure Manifold:

Number of Manifolds: 1

Orifice Size Range (inch): 0.0145 to 0.030

Pressure (psig): 150 ± 25

Water Flow: 8.0 ± 2.0 gallons per minute per inch of orifice strip (gpm/in)

Suction Slot Vacuum (inch of Hg): 5.0 ± 2.0 (-17 ± 10.2 kPa)

High Pressure Manifold:

Number of Manifolds: Maximum of 2

Orifice Size Range (inch): 0.005 to 0.007

Pressure (psig): 1,150 ± 350

Water Flow: 0.9 ± 0.22 gallons per minute per inch of orifice strip

Suction Slot Vacuum (inch of Hg): 5 ± 3 (-17 ± 10.2 kPa)

Manifold Usage Sequence:

The pressurized water jet manifolds and their associated orifice strips can be arranged in a variety of sequences relative to the direction of

continuous travel of the film on the drum. Any of the following five sequences may be used to aperture the film:

1. Low Pressure, High Pressure
2. Low Pressure, High Pressure, High Pressure
- 5 3. High Pressure, Low Pressure
4. High Pressure, Low Pressure, High Pressure
5. High Pressure, High Pressure, Low Pressure

Referring to FIGS. 8-10, the forming member is a three dimensional surface having a plurality of radially extending support elements that rise from the base of the forming or backing member. These elements are substantially similar to the corresponding elements disclosed in co-
10 pending patent application Serial No. 08/417,404.

FIG. 8 is an exploded perspective view of starting film 100 supported on backing member 102. The starting film may be either
15 embossed or unembossed. Alternatively, a portion 104 of starting film 100 comprises embossments 106, and unembossed regions 108 as shown in the upper portion of FIG. 8.

Backing member 102 comprises a base portion 110 having an upper surface 110a and a lower surface 110b. Backing member 102 further
20 comprises a plurality of apertures 112 running through the thickness of base 110 from upper surface 110a to lower surface 110b. As will be seen hereinafter, apertures 112 are provided to allow for removal of water during the manufacture of apertured film according to the invention. Backing
25 member 102 also includes a plurality of radially-extending support elements 114. These support elements comprise a base 116 coinciding with the plane of upper surface 110a of portion 110 and a pair of angled side walls 118, 120 (best seen in FIGS. 9 and 10). Side walls 118, 120 extend outwardly from base 116 to meet at a land portion or ridge 122. Support elements 114 are
30 aligned in parallel and spaced equidistantly from one another. They may run

either parallel to, perpendicular to, or at any angle to the sides of the backing member. As shown in FIGS. 8 and 9, these support elements 114, when viewed in plan, are generally sinusoidal-like or wavy in configuration. It will be understood that the support elements may be provided in other configurations, e.g., straight-line, zig-zag and the like. A detailed description of the forming member is disclosed in co-pending patent application Serial No. 08/417,404.

Referring to FIGS. 11A-D, the progression of the drawing of the starting film 124 to form apertures in accordance with the teachings of the present invention are shown. Referring to FIG. 11A, the starting film 124 is initially laid on the backing member. Referring to FIG. 11B, the film 124 deforms in response to the application of columnar jets of water and is drawn (i.e., stretched) downwardly and partially into the space between support elements. Referring to FIG. 11C, as the film 124 is drawn, it becomes thinner. Referring to FIG. 11D, as the film is further drawn and becomes thinner, it begins to break apart and form holes 126. This process is further described in co-pending patent application Serial No. 08/417,404, wherein the formation of micro-holes surrounded by micro-strips, or fibrils, of film material, is described.

Due to the vertical elements on the forming member, the film of the present invention is expanded (i.e., is given significant dimensionality in the z-direction relative to the original thickness of the precursor unapertured film) immediately as it comes off the process. In some prior art processes, expansion in the z-direction must be accomplished in a separate embossing step (see for example, U.S. Patent No. 4,609,518). An expanded topsheet limits the contact between the wearer and the absorbent layer and thus enhances the feeling of dryness in products that incorporate it.

In the films, absorbent products and methods disclosed herein, the holes in the film include both micro-holes and large sized holes, or may

- 23 -

include large sized holes only. It is believed that the micro-holes are formed primarily from the drawing of film material in response to application of columnar jets of water coming from the smaller orifices of the orifice strip discussed above. It is believed that the large sized holes, also formed from the drawing of film material, are formed primarily in response to application of the columnar jets of water coming from the larger orifices, rather than the smaller orifices, of the orifice strip discussed above.

The resulting apertured film has a combination of large sized holes or apertures having average EHD's of from about 7 mils to about 30 mils, and small sized apertures or holes, sometimes referred to as micro-sized holes, having average EHD's of from about 1 mil to about 7 mils. Such apertured films have an open area in the range of from about 3% to about 13%. It has been found that using orifice strips having orifices whose diameters range from about 10 to 25 mils results in the formation of apertures in the film having an average EHD of about 7 mils to about 17 mils. The fibrils surrounding and defining the micro-holes and the large sized holes are described in detail in co-pending patent application Serial No. 08/417,404. The fibrils have lengths ranging from about 0.005 inch (0.013 cm) to about 0.05 inch (0.127 cm); widths ranging from about 0.001 inch (0.003 cm) to about 0.035 inch (0.089 cm); and thicknesses ranging from about 0.00025 inch (0.006 cm) to about 0.002 inch (0.005 cm).

Photographs in FIGS. 12-18 show the combination of micro-holes and large sized holes of an apertured film.

The combination of large sized holes and micro-holes of the dimensions discussed above yield an improvement in the clean and dry properties of the film when used as a topsheet for a sanitary napkin. The resulting open area is in the range of 3 to 13%. In the prior art film having micro-holes only (see co-pending application Serial No. 08/417,404), when 5 mil diameter columnar jets of water are used, the resulting apertured film has

micro-holes with an average EHD of 3 mils, and has an open area of about 3%. The increased aperture size and open area in an apertured film having large sized holes in combination with micro-holes in accordance with the invention provides an improved level of aperture size and open area so as to strike an advantageous balance: large enough apertures to rapidly accept a flow of menstrual fluid and to allow it to pass through to the napkin's absorbent core, but small enough to mask the stain on the absorbent pad to give the consumer the perception of cleanliness. Thus, the absorbent products of the present invention made with the apertured films of the present invention have much improved clean and dry properties.

In a preferred embodiment of the invention, the starting film is apertured by large diameter, low pressure columnar water jets and small diameter, high pressure columnar water jets. This combination of jets at both high and low pressure produces larger apertures and greater open area than films made with small diameter high pressure jets alone. Films made by this embodiment also appear softer to the user than films made only with large diameter, low pressure jets.

FIG. 19 is a block diagram showing the several steps in the process for producing the novel apertured films of the present invention. The first step in the process is to position a piece of thin, stretchable film of thermoplastic polymer material on a backing or support member (Box 1). The support member with the stretchable film thereon is passed under high pressure fluid ejecting nozzles (Box 2). The preferred fluid is water. The water is transported away from the support member, preferably using a vacuum (Box 3). The film is de-watered, suction being preferred for this purpose (Box 4). The de-watered apertured film is removed from the support member (Box 5). Residual water is removed from the apertured film, e.g., by applying a stream of air thereto (Box 6). Surfactant is next applied to the apertured film (Box 7). The apertured film is then rolled up to await use as

- 25 -

is or as a structural component of another product such as a sanitary napkin, disposable diaper or wound dressing (Box 8).

Referring to FIGS. 20 and 21, there is shown a sanitary napkin 130 comprising an absorbent core 132 of wood pulp fibers, a thin, fluid-impermeable barrier film 134 and a covering material 136 which may be any of the apertured films of the invention. Preferably, the covering film material has the structure shown and described herein. Barrier film 134, which may comprise, e.g., a thin film of polyethylene, contacts the lower surface of absorbent core 132 and runs part way up the longitudinal sides of the absorbent core. Covering material 136 has a length somewhat longer than the length of the absorbent core and is wrapped around the absorbent core and barrier film as shown in FIG. 21. The longitudinal edges of the cover material are overlapped and sealed together on the lower surface of the napkin in the usual manner. In the embodiment illustrated, the cover material is sealed to itself at the ends 138, 140 of the sanitary napkin. As illustrated in FIG. 21, sanitary napkin 130 has a layer of adhesive 142 for adhering the napkin to the undergarment of the user. Adhesive 142 is protected prior to use by a removable release strip 144.

EXAMPLE 1

In one embodiment of the apertured film in accordance with the invention, the starting material is an embossed film supplied by Exxon Chemical under the designation EMB-631, and having a thickness of 0.95 mils. This film is corona discharge treated on its male side. The film is placed on the forming member shown in FIGS. 8-10 which is mounted on a support drum as described in co-pending applications Serial Nos. 08/417,404 and 08/417,408 to Turi et al. with the corona-treated male side of the film facing the forming member. Two manifolds for directing columnar streams of water at the film were used. The first, or upstream, manifold has the

orifice configuration shown in FIG. 7D of the drawings, i.e., there are two offset rows 92, 94 of orifices 92', 94', each of the orifices having a diameter of 0.025 inches. The orifices are spaced a distance of 0.038 inches center-to-center to provide a total of 52.6 holes per inch. The second, or downstream, manifold has the orifice configuration shown in FIG. 7A of the drawings, i.e., there is a single row of orifices each having a diameter of 0.005 inches. The orifices are spaced 0.020 inches on a center-to-center basis. There is a total of 50 such orifices per inch. Water having a temperature of 165°F is supplied at a pressure of 165 psig to the first manifold, and at a pressure of 1400 psig to the second manifold. The film is passed under the manifolds at a speed of 435 feet per minute. The suction pressure inside the drum is minus 50 inches of water. The film is dewatered with the apparatus shown in FIG. 4 and is dried with the apparatus shown in FIG. 5. Following drying, the female side of the film is kiss-coated with a 48.8% solution of Tween-20 in water to a solution add-on of 0.25 mg/in². Subsequent rolling of the film effects transfer of the surfactant solution from the female side to the corona-treated male side. After the surfactant solution ultimately dries, the film has a bulk surfactant add-on (including all surfaces of the film) of 0.12 mg/in². The resulting apertured film has an air permeability of approximately 325 cubic feet per minute per square foot (cfm/ft²) at a pressure differential (ΔP) of 0.5 inches of water. The film has a measured open area of 6.24% and an average ECD of 10-11 mils. ECD (Equivalent Circular Diameter) is a calculated aperture diameter that is based on a measurement of the area of the aperture. The area is measured using the disclosed hardware and software for measuring EHD in co-pending patent application Serial No. 08/417,404. The formula for ECD is $ECD = \frac{\sqrt{4A}}{\pi}$, where A is the measured area of an aperture. There is an average of 500 apertures per square inch. The bulk thickness is 14.5 mils.

The characteristics of the orifice strips used in the experiments described below are shown in Table 1:

Table 1. Characteristics of Orifice Strips

Orifice Strip ID	Orifice Size (inches)	Number Of Rows Of Orifices Per Orifice Strip	Intra-Row Spacing Between Orifices (center-to-center, in.)	Number Of Orifices Per Strip Per Inch Of Orifice Strip
a	0.005	1	0.020	50
b	0.010	2	0.015	133
c	0.015	2	0.022	90.9
d	0.020	2	0.032	62.5
e	0.025	2	0.038	52.6
f	0.025	1	0.083	12

Experimentation With Batch Formation Of Films

The batch film aperturing apparatus used in the experiments reported in Table 2 below was similar to that shown in FIG. 3 of the drawings. However, only one water manifold 42 was used, and only one of the available vacuum slots was used. Each of the orifice strips labeled "b" through "f" in Table 1 was in turn mounted in the single water jet manifold and used to make one or more apertured films as shown in Table 2. The starting film and forming member were the same as those used in Example 1.

A piece of starting film was mounted to the outer surface of the forming member by a series of pins projecting from the forming member. The honeycomb support drum was rotated so that the mounted film was out of line with the single orifice strip. Vacuum was applied to the inside of the honeycomb support drum. Heated, pressurized water was supplied to the manifold. The honeycomb support drum motor was rotated to pass the starting film once under the orifice strip. The resultant film was removed

- 28 -

from the forming member and air dried. Process conditions used to make films and the resultant film properties are shown in Table 2 below.

Table 2. Batch Film Aperturing Experiments

Ex.#	Orifice ID	Water Pressure (psi)	Water Temp. (°F.)	Vacuum* (in. Water)	Film Speed (ft/min)	Open Area (%)**	Mean Equivalent Hydraulic Diameter (EHD)** (mils)
1	b	350	160	60	150	3.6	10.7
2	b	550	160	60	150	6.5	10.3
3	b	1000	160	60	150	8.5	7.7
4	c	200	160	60	150	2.9	11.7
5	c	400	160	60	150	8.7	16.3
6	c	550	160	60	150	11.7	14.3
7	c	850	160	60	150	11.5	8.7
8	d	160	160	60	150	1.5	11.1
9	d	250	160	60	150	8.1	17.1
10	d	350	160	60	150	9.4	14.7
11	d	550	160	60	150	13.2	13.7
12	e	150	160	60	150	2.0	10.1
13	e	240	160	60	150	7.4	14.9
14	e	375	160	60	150	12.8	17.2
14a	f	150	160	60	150	3.5	13.0 (1)
14b	f	200	160	60	150	5.7	12.8 (1)
14c	f	250	160	60	150	6.0	11.5 (1)

* vacuum value is inches of water below atmospheric pressure.

** Open Area and EHD were measured according to the method disclosed in co-pending application Serial No. 08/744,744, which is incorporated herein by reference.

(1) = ECD

- 29 -

The data indicate the following trends:

- Increasing the fluid pressure with an orifice strip of a given size increases open area.
- Increasing the orifice diameter increases open area at a given fluid pressure.

5

Due to stretch of material that occurs during the process of forming apertures, the weight per area of the film is reduced to about 0.47 oz/sq.yd, which is 65% of the initial film weight per unit area. When the 0.025 inch diameter orifice strips spaced at 0.038 inch, 0.050 inch, 0.062 inch and 0.075 inch of Table 8 were used, the open area decreased from 13.1% to 12.0, 11.2, and 10.1% respectively.

10

Experimentation With Continuous Formation Of Film

Additional embodiments of the film were made using the starting film, forming member and general procedure of Example 1. The characteristics of the strips are described in Table 1 above. All of the runs were made using water at 160° F., with the corona treated male side of the starting film facing away from the forming member. The number of strips used, and their characteristics and operating conditions are shown in the following table:

15

20

Table 3. Continuous Film Aperturing Experiments

Experiment #	Orifice Strip #1		Orifice Strip #2		Orifice Strip #3		Line Speed (ft/min)
	Orifice Strip ID	Pressure (psi)	Orifice Strip ID	Pressure (psi)	Orifice Strip ID	Pressure (psi)	
15	d	150					120
16	d	150	a	1000			120
17	d	150	a	1000	a	1000	120
18	a	1000					120
19	a	1000	a	1000			120
20	a	875	a	875	a	875	120
21	a	875	a	875	a	875	150
22	a	1000	d	150			120
23	a	1000	d	150	a	1000	120

Following air drying, the films were kiss-coated with an aqueous solution of Tween 20 surfactant at a concentration of 48.8% on the corona-treated male side to produce a bulk surfactant add-on of 0.12 mg/in² of film as described hereinabove in connection with Example 1.

The apertured films produced in these experiments were evaluated for air permeability, aperture size, open area, strikethrough and bending length (a measure of film stiffness). Tests were run according to the following methods well known in the art. Air permeability was tested according to ASTM D737. Film aperture size and open area were determined and used to calculate Equivalent Circular Diameter (ECD). Strikethrough is the time required for 5 cc of a test fluid to be absorbed through the film supported on ground fluff wood pulp. The test fluid is a mixture of 75% by weight of defibrinated bovine blood and 25% by weight of a 10% by weight aqueous solution of polyvinylpyrrolidone (GAF Povidone K-90). Bending length in the machine direction (MD) and cross direction

- 31 -

(CD) were measured according to ASTM D1388. The properties of the film produced in continuous runs are shown in Tables 4-7 below.

Table 4. Continuous Apertured Film Properties - Air Permeability

Experiment #	Air Permeability CFM/SQFT @ 0.5 in. H ₂ O ΔP)
15	139.33
16	222.00
17	246.67
18	107.00
19	143.67
20	173.67
21	170.67
22	214.33
23	212.67

The data in Table 4 show that the combination of large diameter and small diameter orifices (experiments 16, 17, 22 and 23) produces a more permeable, open film than films made with small diameter orifices alone (experiments 18-21). It is believed that the use of large diameter orifices, albeit used at lower water pressure, is the primary cause for the creation of large holes. Further, it is believed that the use of smaller diameter orifices is the primary cause for the creation of the smaller micro-holes.

Table 5. Continuous Apertured Film Properties - Aperture Size And Open Area

Experiment #	Average Equivalent Circular Diameter (mils)	ECD Standard Deviation (mils)	Open Area (%)	No. Of Apertures/square inch
15	16.46	10.12	4.55	197
16	8.62	9.22	5.34	515
17	7.48	8.47	5.34	715
18	4.65	2.66	2.31	1125
19	4.53	2.65	2.48	1283
20	4.00	2.25	2.38	1635
21	4.16	2.48	2.53	1519
22	6.49	5.59	4.15	806
23	6.88	6.18	4.88	856

The data in Table 5 show that the combination of large diameter and small diameter orifices (experiments 16, 17, 22, and 23) produce a film with larger aperture size and increased open area than films made with small diameter orifices alone (experiments 18-21).

FIGS. 22, 23 and 24 are graphs that show the aperture size distribution of films produced in these experiments with a 5 mil diameter orifice strip (Experiment No. 20), a 20 mil diameter orifice strip (Experiment No. 15), and the combination of a 20 mil orifice strip followed by a 5 mil orifice strip (Experiment No. 16), respectively (see Table 3 above). As seen from these graphs, the apertured films produced with orifice strips of different diameters have aperture sizes that reflect the effects of various of the individual orifice diameters. The film (Experiment No. 20) produced with only a 5 mil orifice strip has apertures most of which have a diameter

- 33 -

under 10 mils (FIG. 22). The film (Experiment No. 15) produced by a 20 mil orifice strip only has a broader distribution of aperture diameters, with peak concentrations at approximately 9 mils and at approximately 23 mils (FIG. 23). The film (Experiment No. 16) produced by a combination of a 5 mil orifice strip and a 20 mil orifice strip has a distribution of aperture diameters that is primarily concentrated under 12 mils, and has a slight concentration of holes with a diameter of around 23 mils (see FIG. 24). These three graphs indicate that the 5 mil orifices create micro-holes primarily, that the 20 mil orifices create larger sized holes primarily, and that a combination of 5 mil orifices and 20 mil orifices creates a combination of micro-holes and large sized holes. Comparable data is shown in FIG. 25 which shows aperture size distribution in a sample of apertured film having micro-holes and large-sized holes in accordance with the invention that was made on a commercial production line.

Table 6. Continuous Apertured Film Properties - Strikethrough Time

Experiment #	Strikethrough Time (sec)
15	16.3
16	17.6
17	13.5
18	28.8
19	25.6
20	20.2
21	22.9
22	15.8
23	17.10

The data in Table 6 show that either large diameter orifices alone, or the combination of large diameter and small diameter orifices

(experiments 15, 16, 17, 22 and 23) produce a film with faster strikethrough times than films made with small diameter orifices alone (experiments 18-21).

Table 7. Continuous Apertured Film Properties - Film Stiffness

Experiment #	MD Bending Length (mm)	CD Bending Length (mm)
15	22.8	6
16	26.3	6.5
17	22.3	6.5
18	27	6.3
19	26.8	5.5
20	26	9.5
21	25.5	8.5
22	23.5	5.8
23	27.30	8.0
comparable commercial product	21.8	14.8

The data indicate that the MD bending length of the films of experiments 15-23 is comparable to those of other commercial sanitary napkin plastic covers, and that the CD bending length of the films is lower than comparable commercial films. Hence, stiffness and expected comfort of the films of the present invention are expected to be comparable or superior to that of other commercial apertured films.

Results of additional experimentation are shown in FIG. 26. In these experiments, the spacing of the orifices was varied to determine the effect on film open area. Two water jet manifolds were used in these experiments. The first, or upstream, manifold had one orifice strip with two rows of orifices on respective sides of the longitudinal center line of the strip,

- 35 -

the two rows of orifices being offset as shown in FIGS. 7B-7D, i.e., the offset distance was one-half the intra-row, center-to-center spacing of the orifices. All orifices had a diameter of 0.025 inch. The center-to-center spacing of the orifices for each experiment was varied as reported in Table 8.

5 The second, or downstream, manifold had one orifice strip with a single row of orifices therein. The orifices each had a diameter of 0.005 inch and were spaced 0.020 inch on a center-to-center basis. Water was supplied to the first manifold at 150 psig. Water was supplied to the second manifold at 1000 psig. The film traveled at 150 ft/min. The drum vacuum was 60 inches water. The following Table 8 indicates the open area, number of apertures per in², ECD and air permeability for the resulting apertured films.

Table 8

Film Number	Large Orifice* Spacing, inch	Open Area, %	Number of Apertures	Equivalent Circular Diameter, inch	Air Permeability
24	0.038	13.1	914	0.0099	505
25	0.050	12.0	1136	0.0085	476
26	0.062	11.2	1151	0.0081	465
27	0.075	10.1	1299	0.0072	435

* Two rows of 25 mil diameter orifices.

25 Air permeability was measured per ASTM D737; results are reported in Table 8 in cubic feet per minute per square foot of film. The air permeabilities of film apertured at 150 psig and 150 ft/min. were 310 cfm/sf for the 25-mil diameter orifice strip (only) (0.038 inch spacing) control, which decreased nearly linearly to 245 cfm/sf for the 0.075 inch spacing.

30 When the 5-mil diameter orifice strip was added, the air permeability increased to 505 cfm/sf for the control spacing. There was a nearly linear

- 36 -

decrease with spacing to a value to 435 cfm/sf at 0.075 inches. At 150 ft/min., the combination of the large diameter, 25 mil diameter control strip with the 5-mil strip provides about 195 cfm/sf beyond the measured air permeability of the large hole strip alone. The above data indicates that as large orifice spacing increases, fewer large-sized holes are produced, and the open area is accordingly reduced.

Wettability Of Non-Apertured Film With Surfactant Treatment

The following Table-9 shows the results of testing of Exxon EMB-631 with the male side having been corona discharge treated. The contact angle and surfactant distribution between the male and female sides, after roll-up, were tested. The contact angle was also measured on the male and female sides when there was no surfactant supplied to the film.

Table 9. Distilled Water Contact Angles And
Surfactant Distribution of Processed Exxon EMB-631 Films

EMB-631 With Male Corona Treatment

	No Surfactant Treatment		Male Surfactant Treatment		Female Surfactant Treatment	
	Male	Female	Male	Female	Male	Female
<u>Contact Angle</u>						
aver.	72	102	0	78	0	76
std. dev.	6	7	0	11	0	3
<u>Surfactant Distribution</u>						
aver.	0.000	0.000	0.869	0.249	0.775	0.429
std. dev.			0.107	0.089	0.093	0.040

The above data indicates that corona discharge treatment reduces the contact angle of the film. The above data further indicates that the application of surfactant to either the corona treated or non-corona treated side, followed by a roll-up of the film results in a distribution of surfactant wherein over 65% of the surfactant ends up on the corona treated side.

- 37 -

Further, the data shows that the application of surfactant lowers substantially the contact angle on the non-corona treated side, and lowers the contact angle on the corona treated side to zero. It is believed that the gradient in the contact angle, wherein the contact angle is substantially lower on the corona-treated side of the film, establishes a desirable "hydrophilicity gradient" that facilitates z-direction flow through the film. Further, the lowering of the contact angle on both sides of the film is believed to substantially improve x and y direction flow along the top and bottom surfaces of the film. In a sanitary napkin in which the corona-treated side of the apertured film faces the absorbent core, improved spreading of fluids in the x and y direction is expected to enhance the z-direction flow of fluids to the absorbent core that is adjacent the lower surface of the film.

Top surface contact angle, bottom surface contact angle, film aperture pattern, and embossing pattern can be combined in various ways to yield the desired fluid distribution properties. Employing a cupped female emboss pattern on the body facing side of the film, a top surface film/air/synthetic menstrual fluid contact angle less than or equal to 70° , and a bottom contact angle less than or equal to 40° , with bottom contact angle less than or equal to top contact angle in an apertured film having micro-holes and large-sized holes in accordance with the invention (and which has the surfactant applied to the top female side and the film is rolled up to transfer surfactant to the male corona treated side), results in a film with limited fluid spreading in the non-apertured contiguous regions on the body facing side (see FIGS. 29 and 30), yet with a z-directional wettability differential or "hydrophilicity gradient", and excellent fluid wicking properties on the absorbent core side of the apertured film. These factors combine to deliver an absorbent article cover material that provides reduced leakage occurrence, and excellent fluid penetration and clean/dry properties.

This cover may be especially useful in combination with other internal absorbent components designed to enhance horizontal wicking.

The example discussed immediately above offers a fluid penetration rate (as measured by 5cc synthetic menstrual fluid strikethrough times -- test method described in co-pending patent application Serial No. 08/417,404), which is improved over non-surfactant-treated films by approximately 45%, in either a pulp absorbent core construction or a peat moss based absorbent construction.

The following Table 10 contains the results of a drop test measuring the time needed for absorption of one drop of synthetic menstrual fluid. In Table 10, the Cover refers to apertured film material. All of the covers contain micro-holes and large-sized holes. Covers 3 and 4 are made in accordance with the present invention, but differ with respect to the surface on which surfactant was initially applied. The test determines the time elapsed for the absorption of fluid, with a lower time being preferable and indicating greater absorption capacity.

Table 10. Effects Of Corona Orientation,
Embossing And Surfactant Application On Cover Performance

Cover #	Corona Position	Surfactant Application	Drop Test (sec)	
			Suspended Cover	Cover On Peat Moss Based Absorbent Core (no tilt)
1	top	top	> 60	> 60
2	top	bottom	> 60	> 60
3	bottom	top	11	39
4	bottom	bottom	2	1
5	top	none	> 60	> 60
6	bottom	none	> 60	> 60

- 39 -

As seen from the reduced absorption times for covers 3 and 4, the above data confirms the advantages of applying surfactant to the bottom, corona treated surface of an apertured film topsheet.

5

WHAT IS CLAIMED IS:

1. A method for forming an apertured film from a stretchable thermoplastic polymeric material comprising:
 - 5 a) providing a starting film comprising said stretchable thermoplastic polymeric material and having an upper side and a lower corona discharge treated side;
 - b) providing a backing member comprising localized support regions for supporting said starting film, recessed zones into which the film may be deformed by the application thereto of fluids, and means for
10 allowing said applied fluid to be transported away from said backing member;
 - c) supporting said starting film on said backing member with portions of the lower side of said film being in contact with the support regions of said backing member and with the upper side of said film facing
15 away from said backing member;
 - d) directing a fluid in the form of columnar streams from at least two sets of orifices against the upper side of said starting film in a zone of contact, the orifices of the first set each having a diameter greater than ten
20 mils and the fluid supplied thereto having a pressure less than 500 psig. to cause the formation of large sized holes in said starting film, the orifices of the second set each having a diameter less than or equal to ten mils and the fluid supplied thereto having a pressure of at least 500 psig. to cause the formation of micro-holes in said starting film, whereby a combination of large sized and micro-holes are formed in said starting film;
 - 25 e) moving said film from said contact zone;
 - f) coating the upper side of said apertured film with a surface active agent; and
 - g) winding said apertured film into a roll with said lower and upper sides being in surface-to-surface contact, whereby at least a portion

of said surface active agent is transferred from the upper side of the film to the lower side thereof.

2. The method of claim 1 wherein said starting film is embossed so as to have a male side and a female side.

5 3. The method of claim 2 wherein the lower side of the starting film is the male side and the upper side of the film is the female side.

4. The method of claim 1 wherein said directing step includes directing fluid from said first set of orifices against said starting film before directing fluid from said second set of orifices against said film.

10 5. The method of claim 1 wherein the step of coating said apertured film is performed by applying the surface active agent in a water-based solution.

6. The method of claim 1 wherein the surface active agent is uniformly applied to the upper side of the apertured film.

15 7. A method of forming an apertured film having improved fluid distribution properties and comprising the steps of:

a) providing an embossed starting film having a corona discharge treated male side and a female side;

20 b) supporting said embossed starting film on a three-dimensional forming member with the corona discharge treated male side of said film facing said forming member;

c) directing a fluid in the form of columnar jets against the female side of said film with a force sufficient to form apertures in said film;

d) drying said apertured film;

25 e) applying a surface active agent to the female side of said apertured film; and

f) winding said apertured film into a roll with said male and female sides being in surface-to-surface contact, whereby at least a

portion of said surface active agent is transferred from the female side of the film to the male side thereof.

8. A method of forming an apertured film having improved fluid distribution properties and comprising the steps of:

- 5: a) providing an embossed starting film having a male side and a female side;
- b) corona discharge treating at least the male side of said starting film;
- 10: c) supporting said embossed starting film on a three-dimensional forming member with the corona discharge treated male side of said film facing said forming member;
- d) directing a fluid in the form of columnar jets against the female side of said film with a force sufficient to form apertures in said film;
- e) drying said apertured film;
- 15: f) applying a surface active agent to one side of said apertured film; and
- g) winding said apertured film into a roll.

9. The method of claim 8 wherein said surface active agent is applied directly on the male side of said apertured film.

20: 10. The method of claim 8 wherein said winding step includes transferring at least a portion of said surface active agent to the other side of said apertured film.

11. The method of claim 8 wherein said surface active agent is applied by coating the female side of said apertured film.

25: 12. The method of claim 11, including transferring at least a portion of said surface active agent to the male side of said apertured film when said apertured film is wound into a roll.

13. The method of claim 12 wherein more than 50% of the surface active agent is transferred to the male side of the apertured film.

14. The method of claim 8 wherein said apertures include large sized holes.

15. The method of claim 8 wherein said surface active agent is applied to both male and female sides of said film.

5 16. The method of claim 15 wherein greater than 50% of the applied surface active agent is distributed to said male side.

17. The method of claim 15 wherein greater than 75% of the applied surface active agent is distributed to said male side.

10 18. The method of claim 8 wherein said apertures include large sized holes and micro-holes.

19. The method of claim 8 wherein the step of coating said apertured film is performed by applying the surface active agent in a water-based solution.

15 20. The method of claim 8 wherein the surface active agent is uniformly applied to the corona discharge treated side of the apertured film.

21. A method for forming an apertured film from a stretchable thermoplastic polymeric material comprising:

20 a) providing a starting film comprising said stretchable thermoplastic polymeric material and having an upper side and a lower corona discharge treated side;

25 b) providing a backing member comprising localized support regions for supporting said starting film, recessed zones into which the film may be deformed by the application thereto of fluids, and means for allowing said applied fluid to be transported away from said backing member;

c) supporting said starting film on said backing member with portions of the lower side of said film being in contact with the support

regions of said backing member and with the upper side of said film facing away from said backing member;

5 d) directing a fluid in the form of columnar streams from at least two sets of orifices against the upper side of said starting film in a zone of contact, the orifices of the first set having a diameter greater than ten mils and the fluid supplied thereto having a pressure less than 500 psig. to cause the formation of large sized holes in said starting film, the orifices of the second set having a diameter less than or equal to ten mils and the fluid supplied thereto having a pressure of at least 500 psig. to cause the formation of micro-holes in said starting film, whereby a combination of large sized and micro-holes are formed in said starting film;

10 e) moving said film from said contact zone; and
f) coating the both sides of said apertured film with a surface active agent.

15 22. A method according to claim 21 wherein one side of said apertured film is initially coated with said surface active agent, and said apertured film is wound into a roll with said lower and upper sides being in surface-to-surface contact, whereby at least a portion of said surface active agent is transferred from one side of the film to the other side thereof.

20 23. A method according to claim 22 wherein the lower corona discharge treated side is initially coated with said surface active agent.

24. A method according to claim 22 wherein the upper side of said film is initially coated with said surface active agent.

25 25. A method according to claim 21 wherein said starting film is embossed so as to have a male side and a female side.

26. The method of claim 14 wherein the step of coating said the apertured film is performed by applying the surface active agent in a water-based solution.

- 45 -

27. The method of claim 14 wherein the surface active agent is uniformly applied to the corona discharge treated side of the apertured film.

5 28. An absorbent product comprising: an absorbent core having oppositely facing major surfaces, an apertured film covering at least one of said major surfaces, said apertured film having an outwardly facing body contacting side and an opposite side facing inwardly toward said core, said apertured film being formed from an embossed starting film of stretchable thermoplastic polymeric material, said starting film having a given thickness dimension and a male side and a female side, the inwardly facing side of said apertured film being corona discharge treated, both sides of said film having surfactant thereon, said apertured film having a plurality of apertures extending through the thickness dimension of said film, said plurality of apertures including first and second groups of apertures, and the apertures of said first group having a size greater than the size of the apertures in said second group, the apertures of said first and second group being defined by fibrils formed from said thermoplastic polymeric material.

15 29. The absorbent product of claim 28 wherein said apertured film has an overall thickness greater than the given thickness dimension of said starting film.

20 30. An absorbent product according to claim 28 wherein said inwardly facing side of said apertured film is the male side and has more surfactant than said female side of said apertured film.

25 31. An absorbent product comprising: an absorbent core having oppositely facing major surfaces, an apertured film covering at least one of said major surfaces, said apertured film having an outwardly facing body contacting side and an opposite side facing inwardly toward said core, said apertured film being formed from an embossed starting film of stretchable thermoplastic polymeric material having a male side and a female

side, the female side of said apertured film being the outwardly facing body contacting side and the male side of said apertured film being corona discharge treated and the side facing inwardly toward said core, at least the male side of said film having surfactant thereon, the apertures in said film being defined by fibrils formed from said thermoplastic material.

5 32. An absorbent product comprising: an absorbent core having oppositely facing major surfaces, an apertured film covering at least one of said major surfaces, said apertured film having an outwardly facing body contacting side and an opposite side facing inwardly toward said core, said apertured film being formed from a starting film of stretchable
10 thermoplastic polymeric material, said starting film having a given thickness dimension, the inwardly facing side of said apertured film being corona discharge treated, both sides of said film having surfactant thereon, said apertured film having a plurality of apertures extending through the thickness
15 dimension of said film.

33. The absorbent product of claim 32 wherein said apertured film has an overall thickness greater than the given thickness dimension of said starting film.

20 34. The absorbent product of claim 22, wherein said starting film is embossed and has a male side and a female side, said male side being inwardly facing.

25 35. An apertured film comprising an embossed starting film of thermoplastic polymeric material having a corona treated side and a non-corona treated side, said starting film having been coated with a surface active agent on both sides, said starting film having been apertured by the directing of columnar jets of fluid against said non-corona treated side of said starting film so as to deflect said starting film and form apertures, said apertures in said film being defined by fibrils formed from said thermoplastic material.

- 47 -

36. An apertured film in accordance with claim 35 wherein said apertures comprise micro-holes and large sized holes.

37. An apertured film in accordance with claim 36 wherein said micro-holes have an average EHD of about 1 mil to about 7 mils.

5 38. An apertured film in accordance with claim 37 wherein said micro-holes have an average EHD of about 4 mil to about 6 mils.

39. An apertured film in accordance with claim 36 wherein said large sized holes have an average EHD of about 7 mils to about 30 mils.

10 40. An apertured film in accordance with claim 36 wherein said large sized holes have an average EHD of about 10 mils to about 25 mils.

41. An apertured film in accordance with claim 35 wherein said fibrils have a length in the range of about 0.005 inch to about 0.05 inch.

15 42. An apertured film in accordance with claim 35 wherein said fibrils have a width in the range of about 0.001 inch to about 0.035 inch.

43. An apertured film in accordance with claim 35 wherein said fibrils have a thickness in the range of about 0.00025 inch to about 0.002 inch.

20 44. An apertured film in accordance with claim 35 wherein said surface active agent has been initially applied to said non-corona treated side of said starting film, said starting film having been wound into a roll with said corona and non-corona treated sides being in surface-to-surface contact, whereby at least a portion of said surface active agent has been
25 transferred from said non-corona treated side of said film to said corona treated side thereof.

45. An apertured film in accordance with claim 44 wherein at least 50% of said surface active agent has been transferred from said non-corona treated side to said corona treated side of said film.

- 48 -

46. An apertured film in accordance with claim 44 wherein at least 75% of said surface active agent has been transferred from said non-corona treated side to said corona treated side of said film.

5 47. An apertured film in accordance with claim 35 wherein the contact angle of said non-corona treated side of said apertured film is less than 90 degrees.

48. An apertured film in accordance with claim 35 wherein the contact angle of said corona treated side of said apertured film is less than 40 degrees.

10 49. An apertured film in accordance with claim 35 wherein the contact angle of said corona treated side of said apertured film is zero degrees.


15

20



25

1/18



Fig. 1

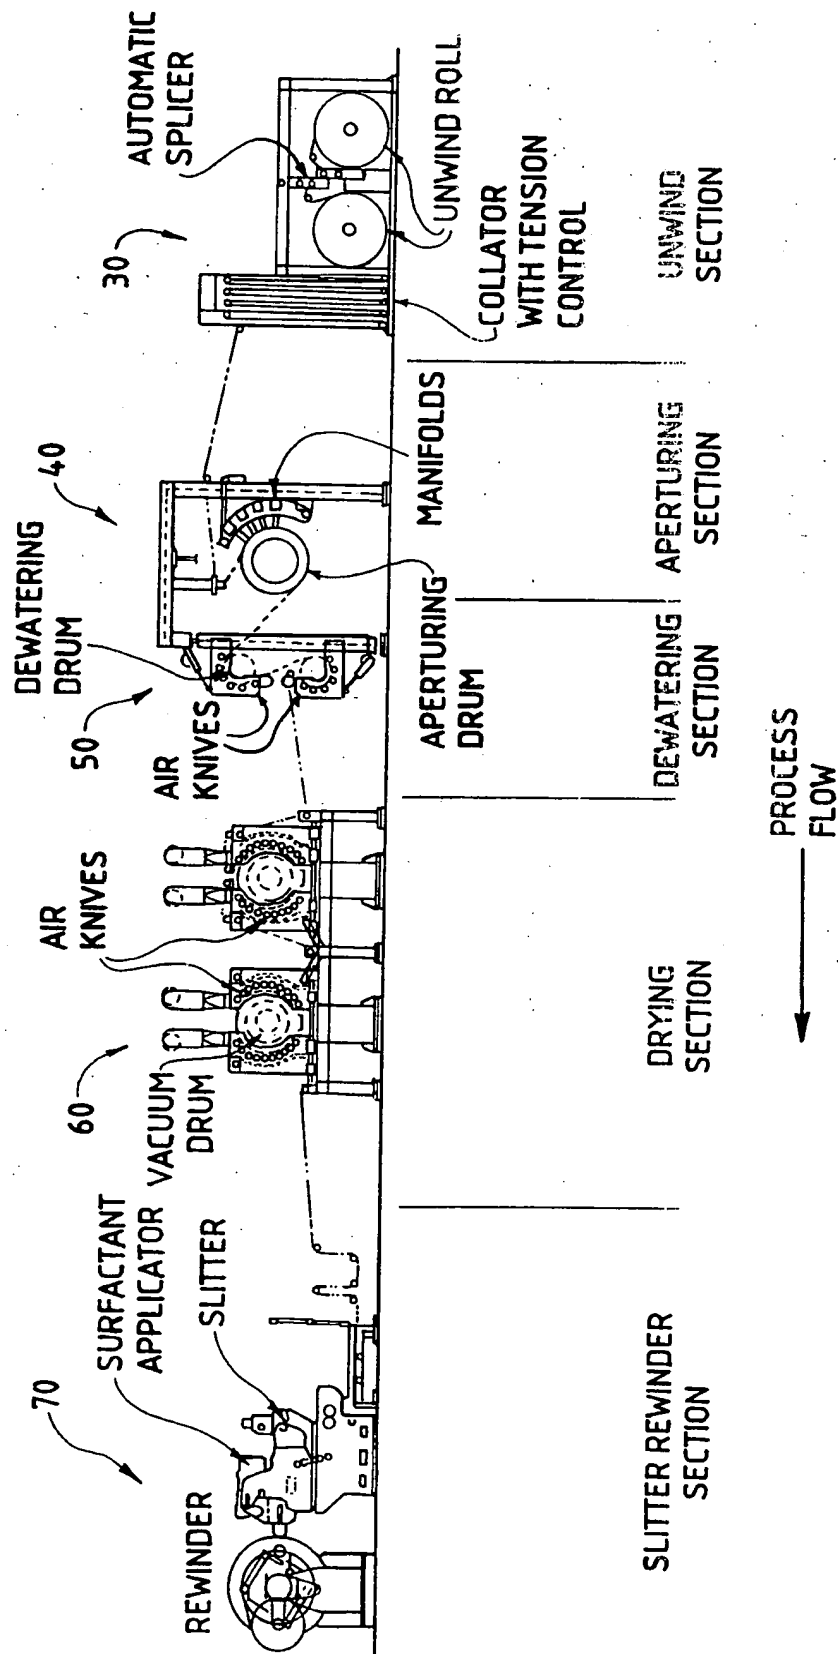

2/18

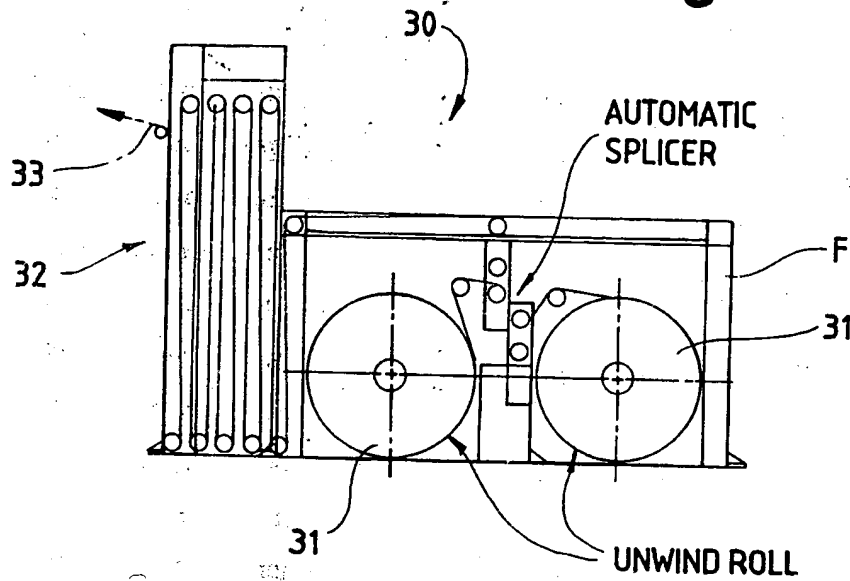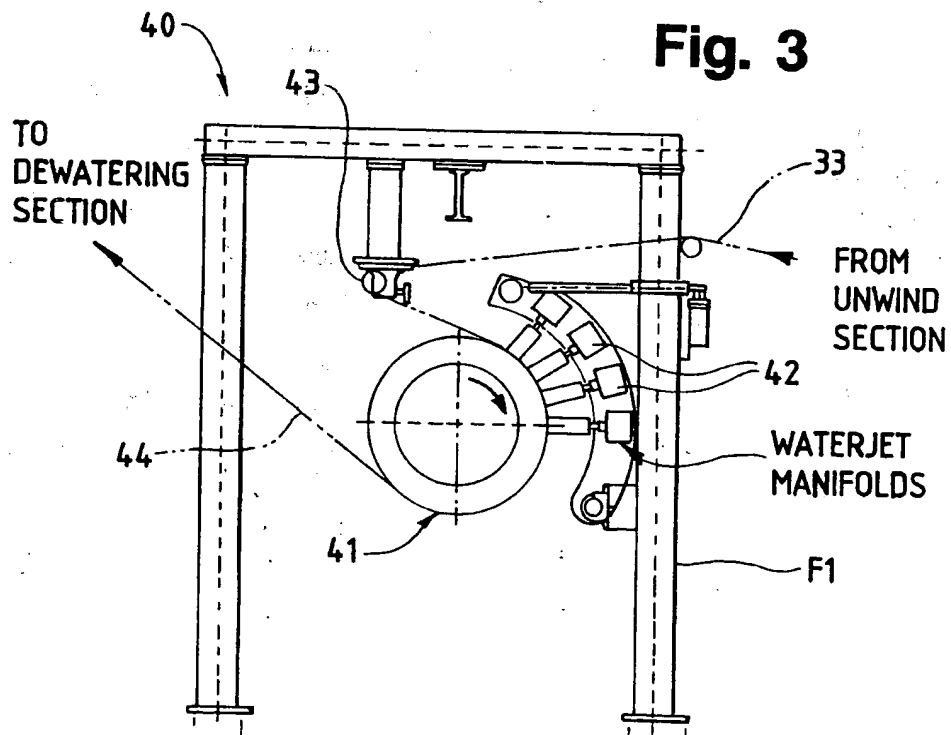Fig. 2**Fig. 3**

3/18

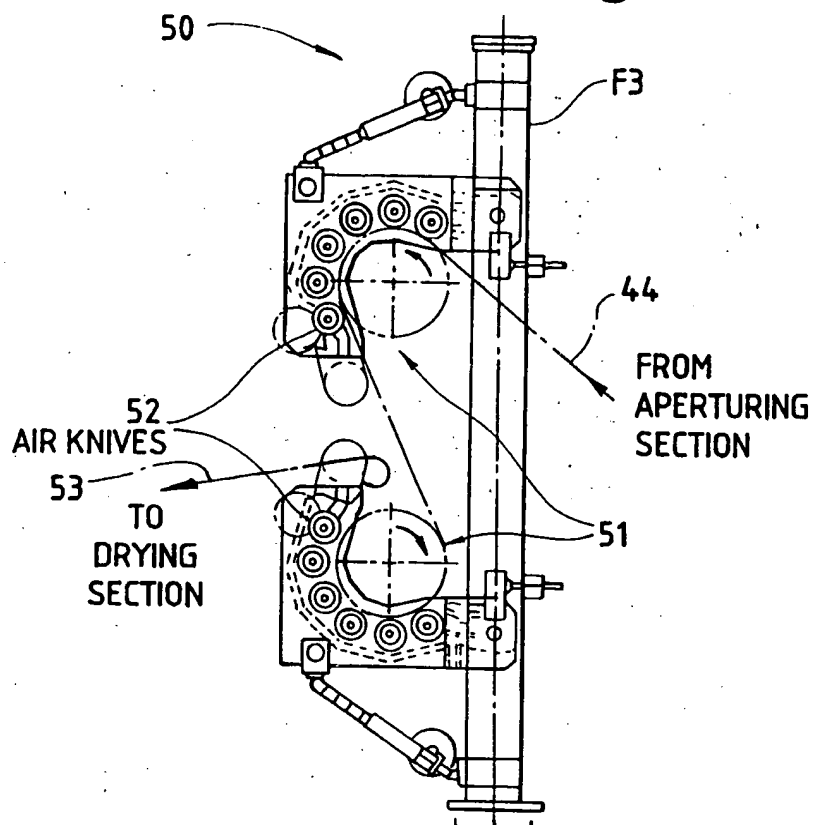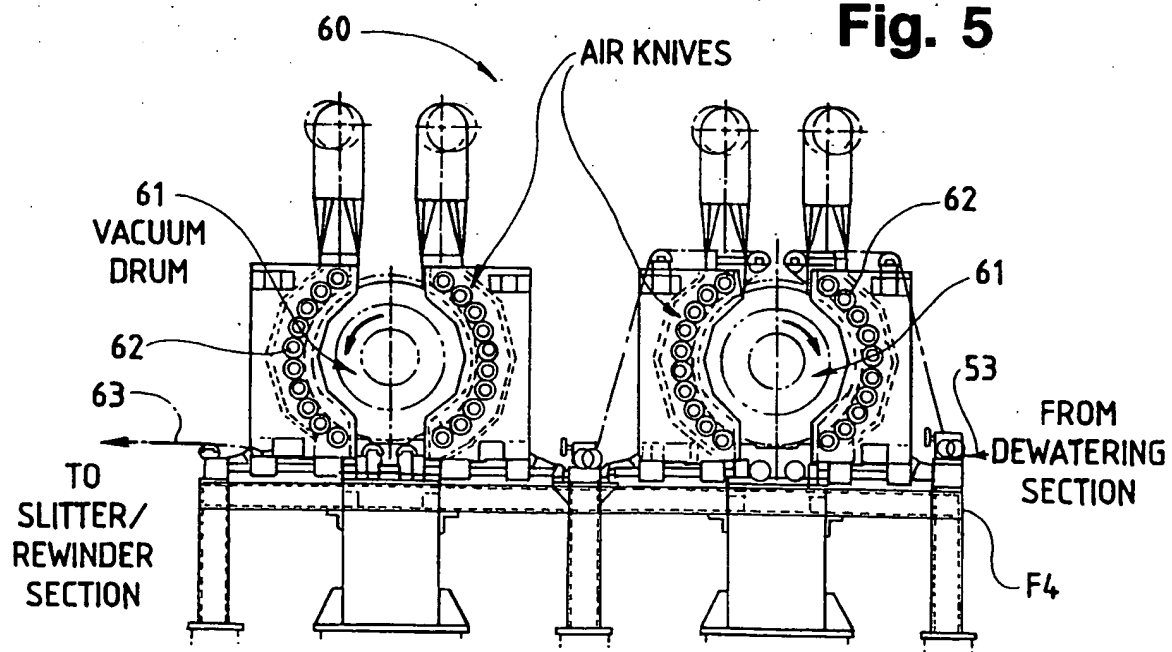Fig. 4**Fig. 5**

4/18

Fig. 6

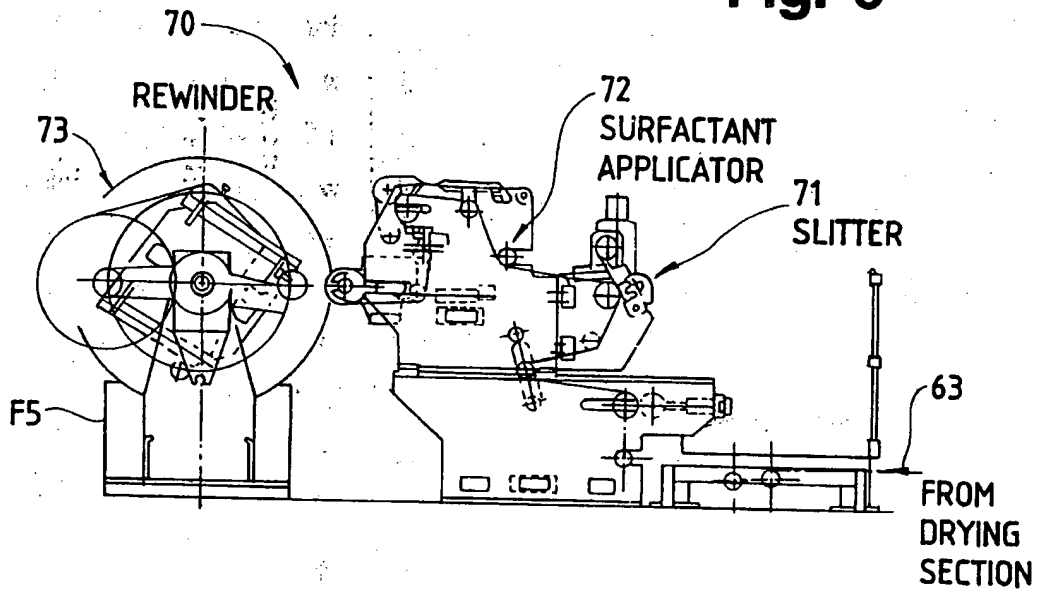


Fig. 7A


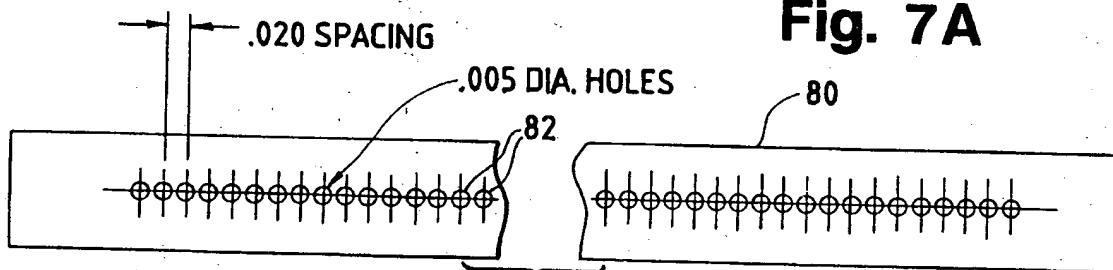


Fig. 7B

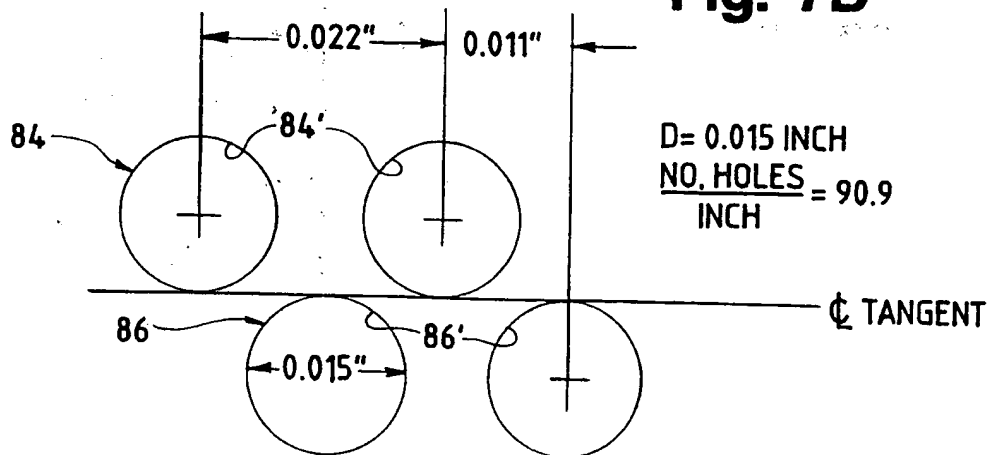

$$\frac{D = 0.015 \text{ INCH}}{\text{NO. HOLES}} = 90.9 \text{ INCH}$$

5/18

Fig. 7C

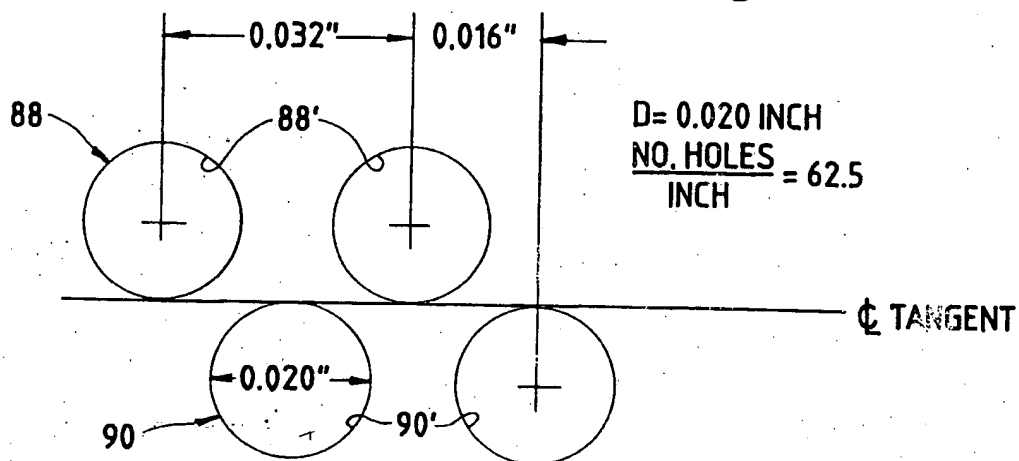


Fig. 7D


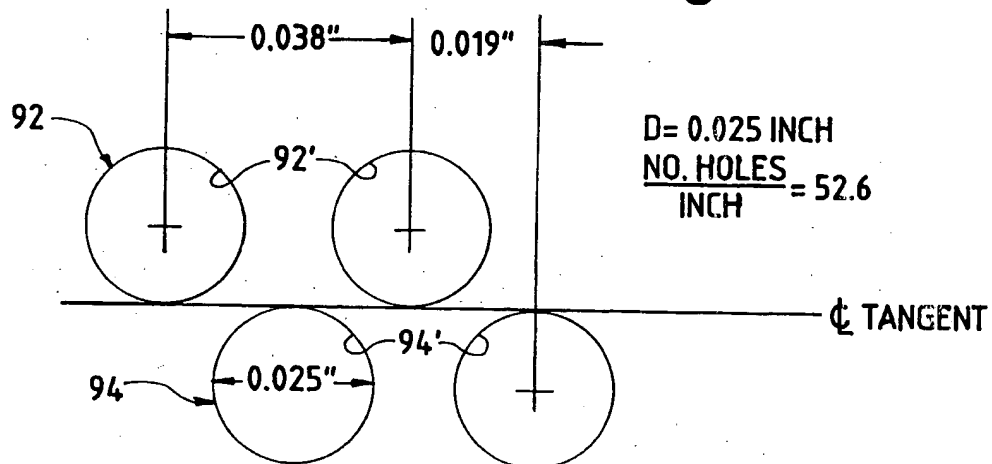



Fig. 7E

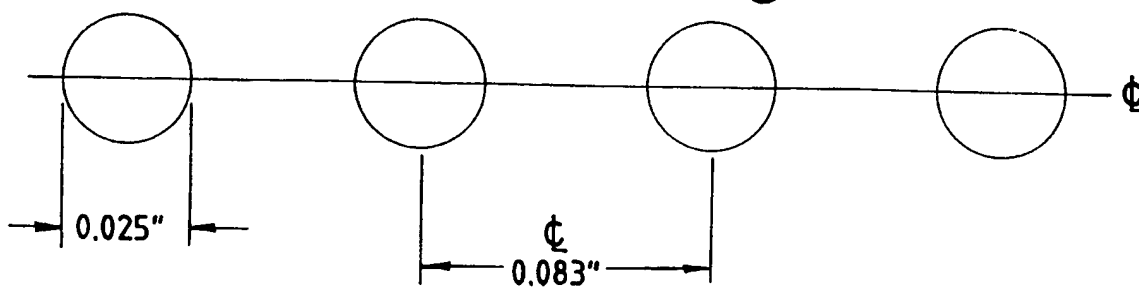

SUBSTITUTE SHEET (RULE 26)

6/18

Fig. 8

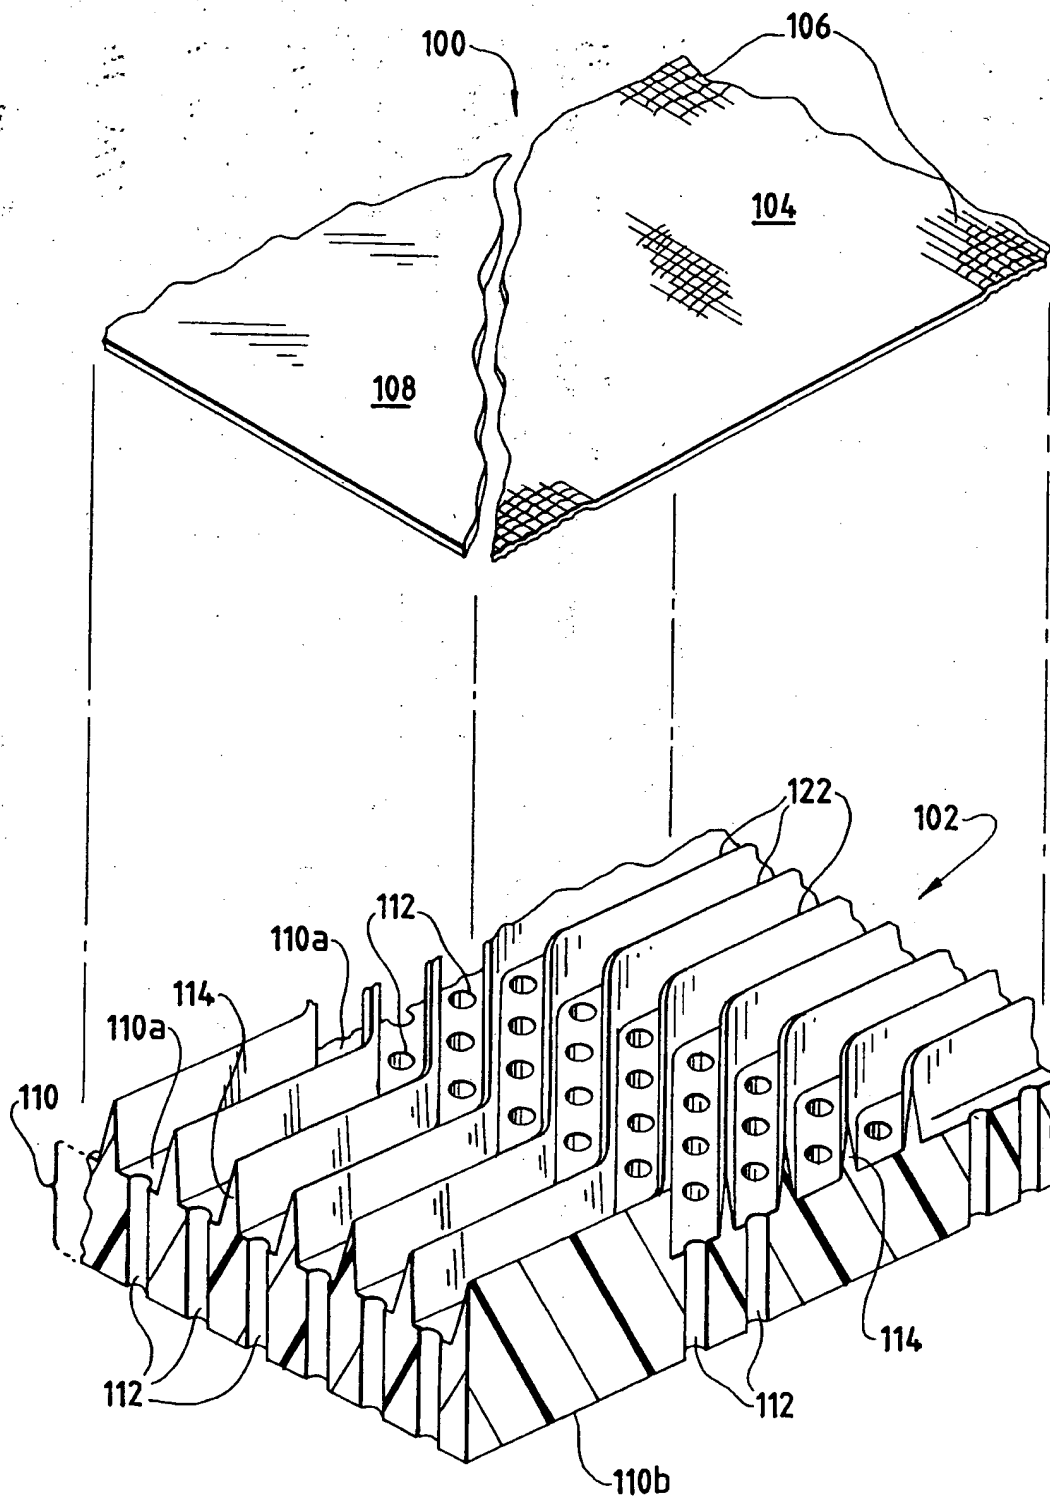

7/18

Fig. 9


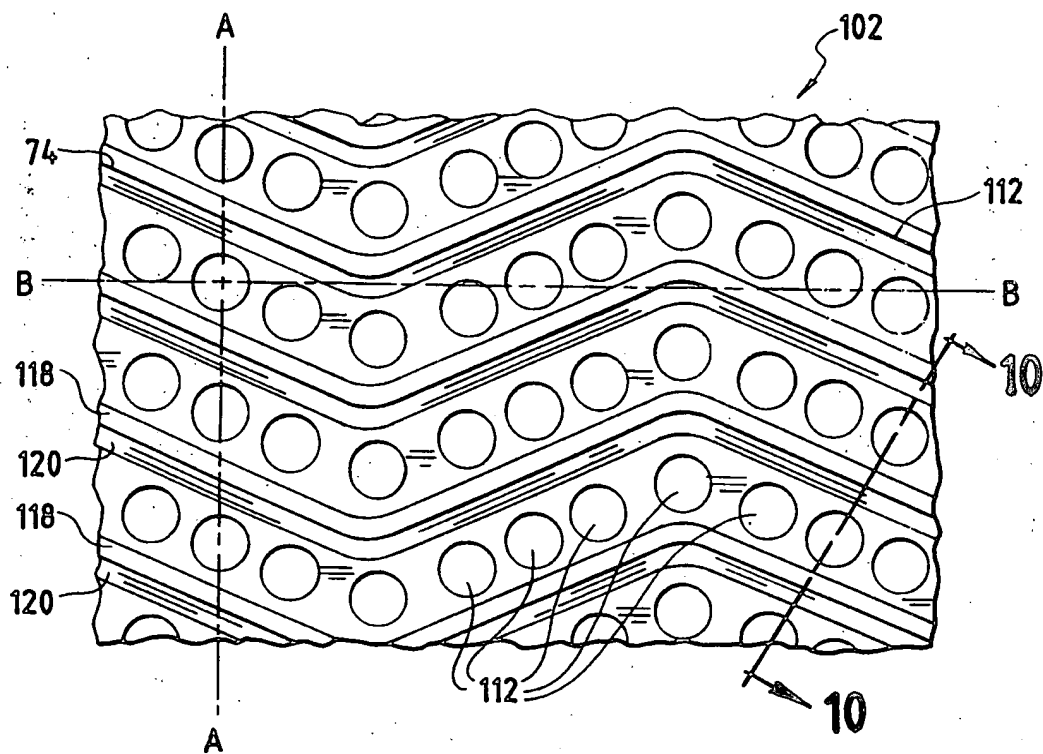


Fig. 10

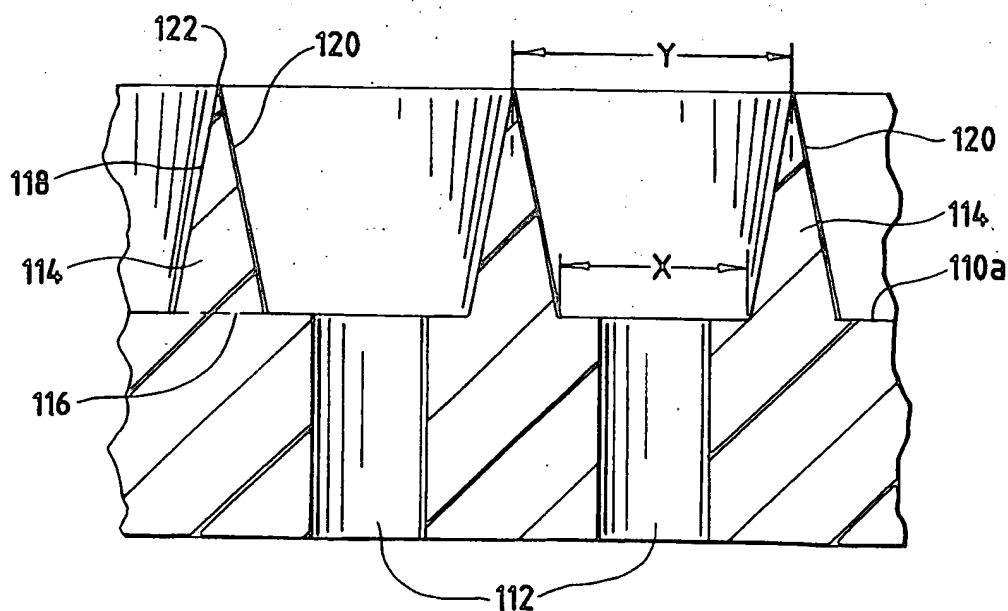

8/18

Fig. 11A

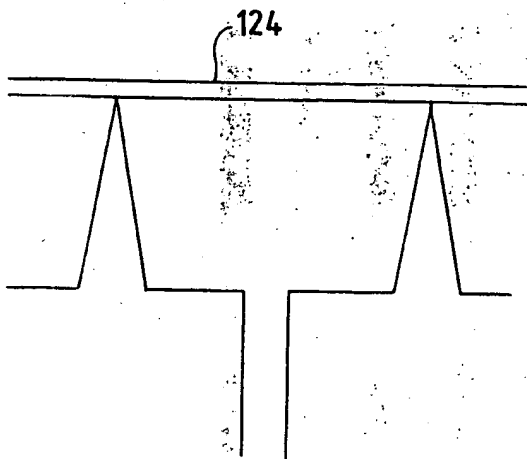


Fig. 11B

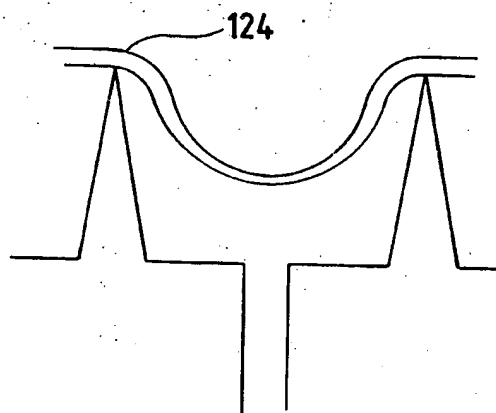


Fig. 11C


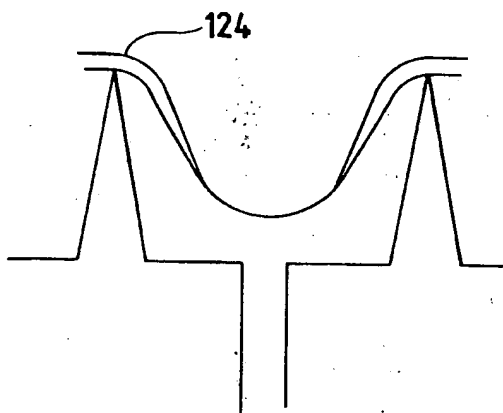


Fig. 11D

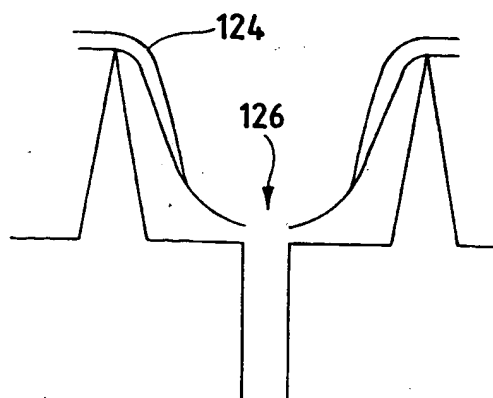

9/18



Fig. 12



Fig. 13

10/18

Fig. 14



Fig. 15

11/18

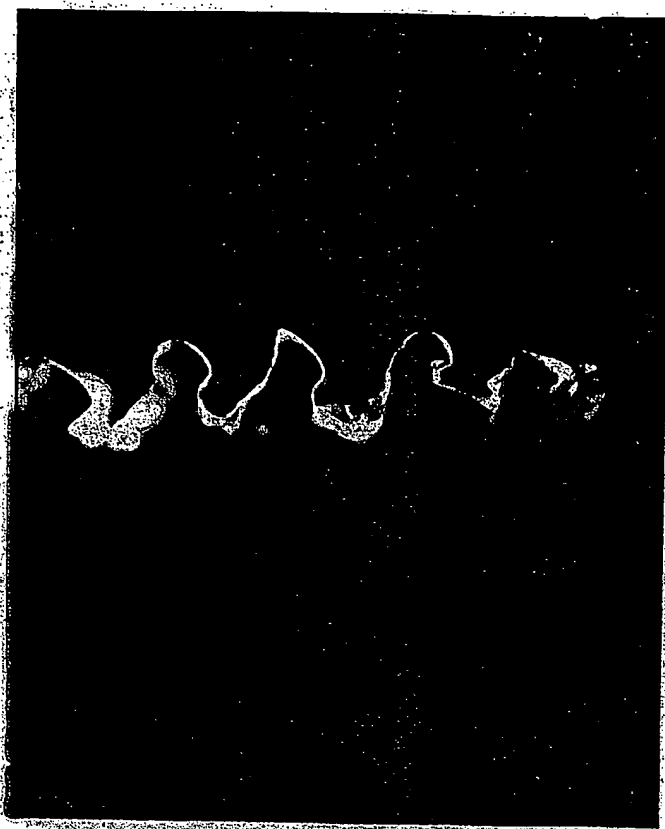


Fig. 16

Fig. 17



12/18

Fig. 18A




13/18

Fig. 18B



14/18

Fig. 19

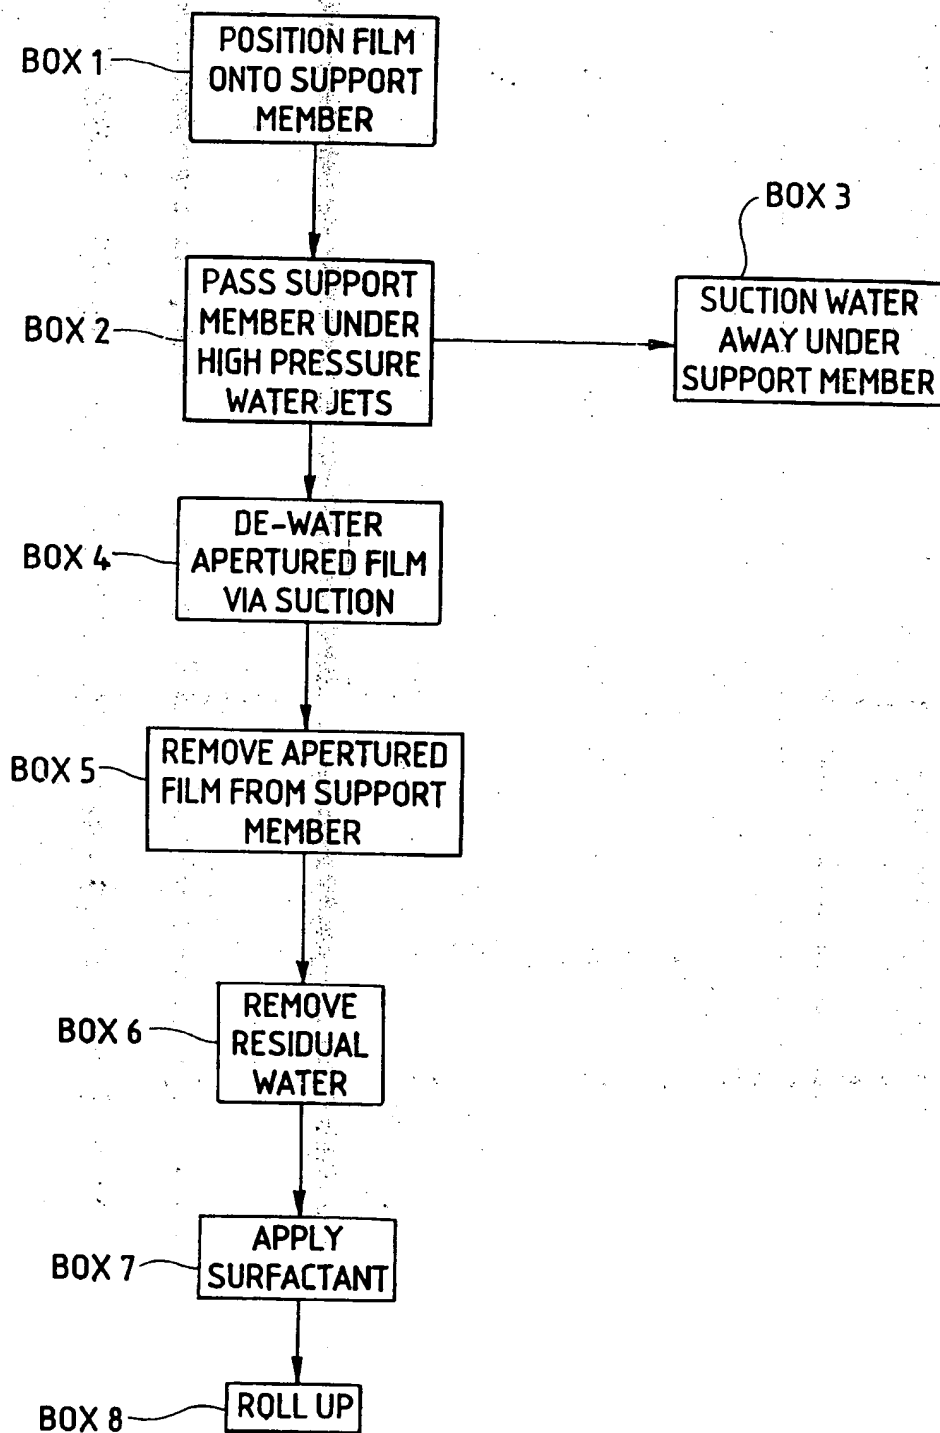

15/18

Fig. 20




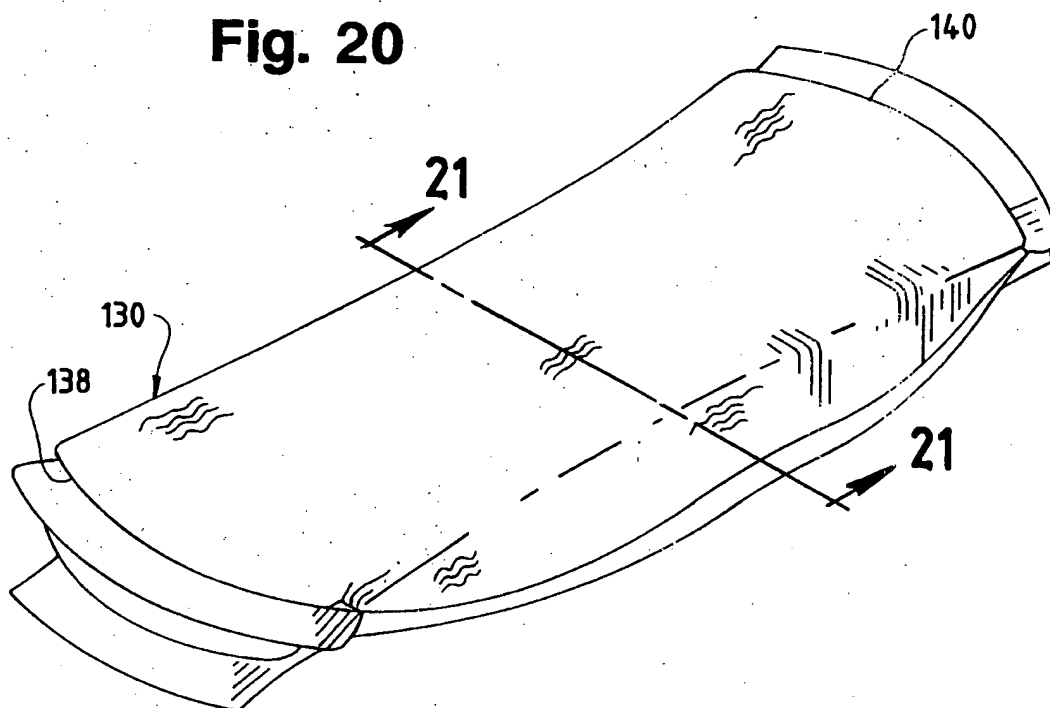


Fig. 21

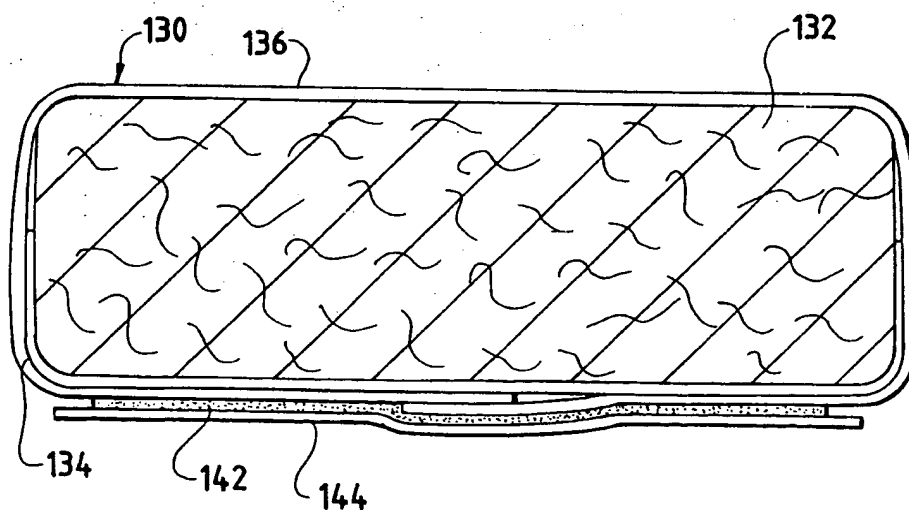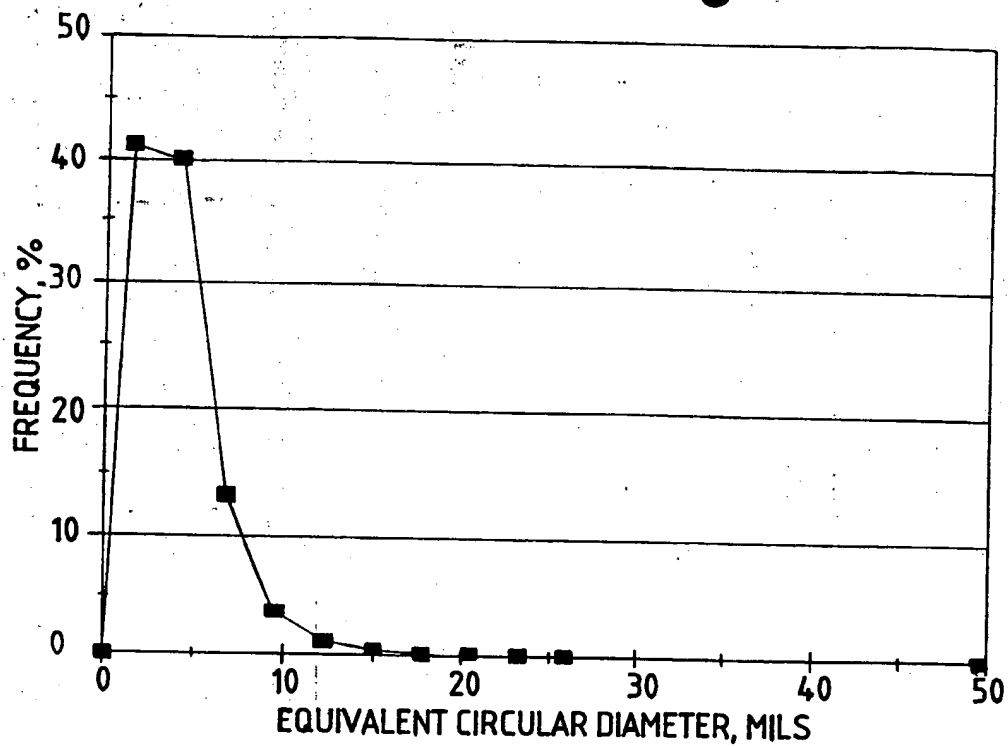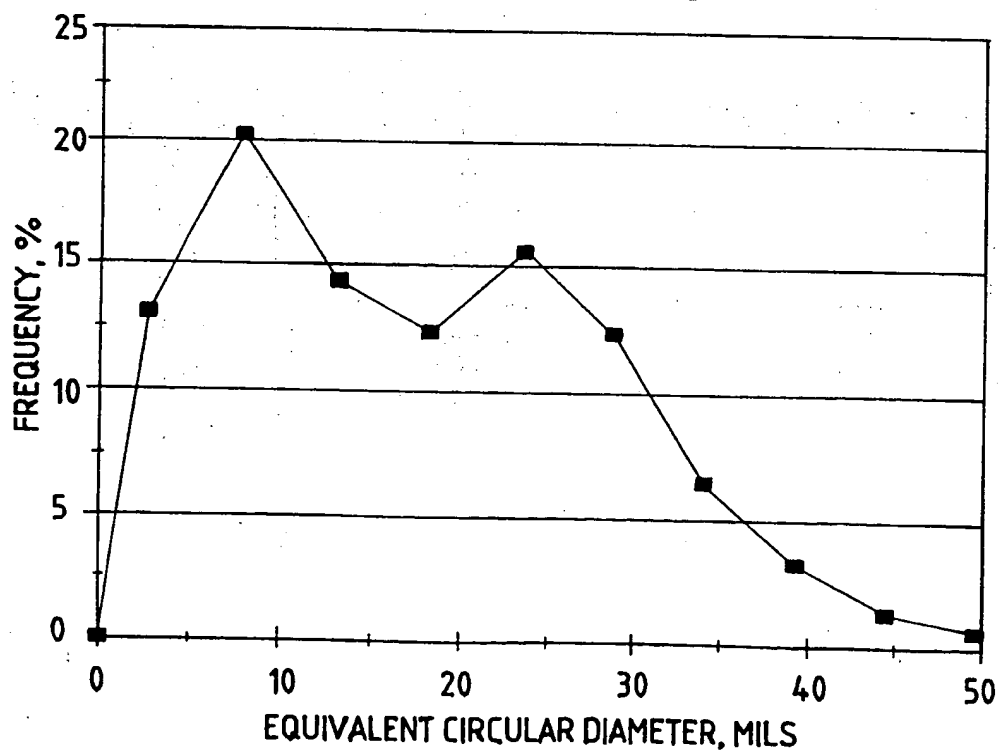

16/18

Fig. 22**Fig. 23**

17/18

Fig. 24



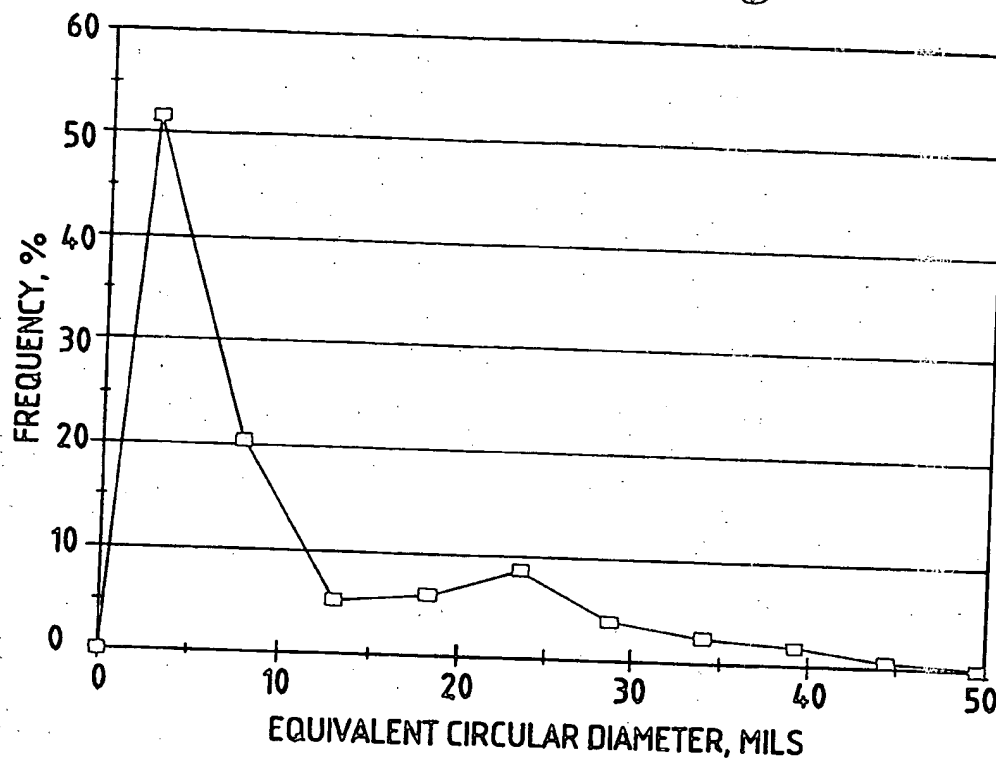


Fig. 25

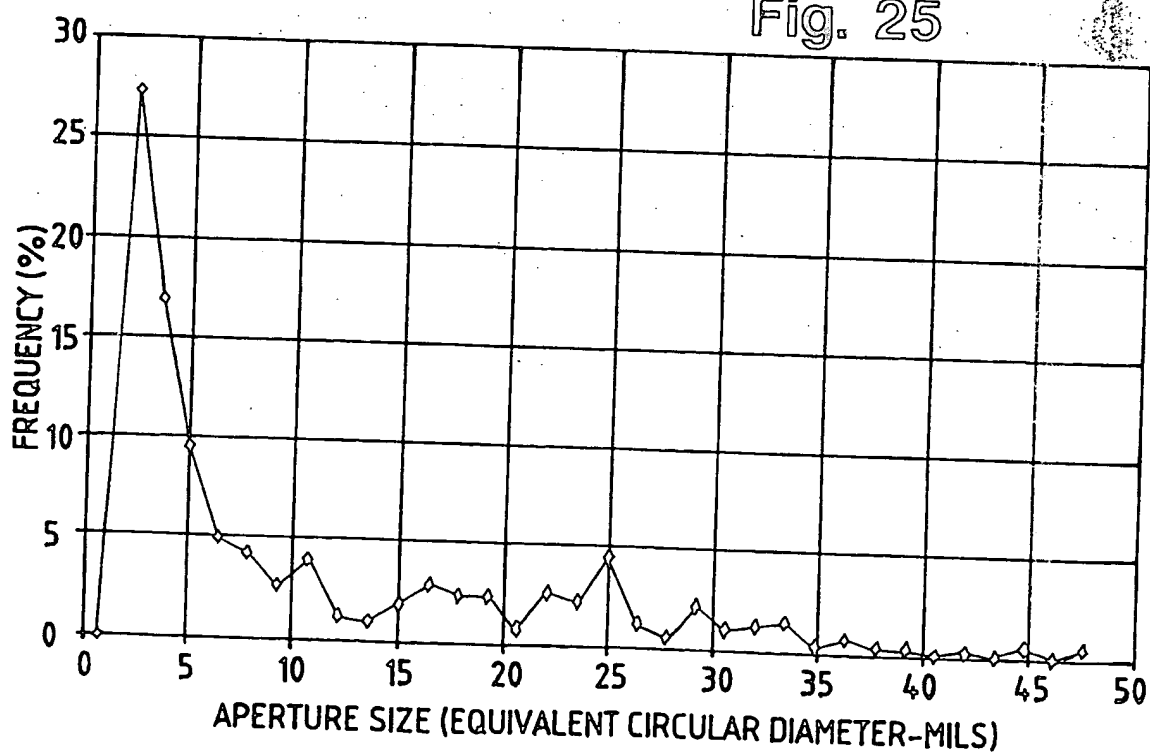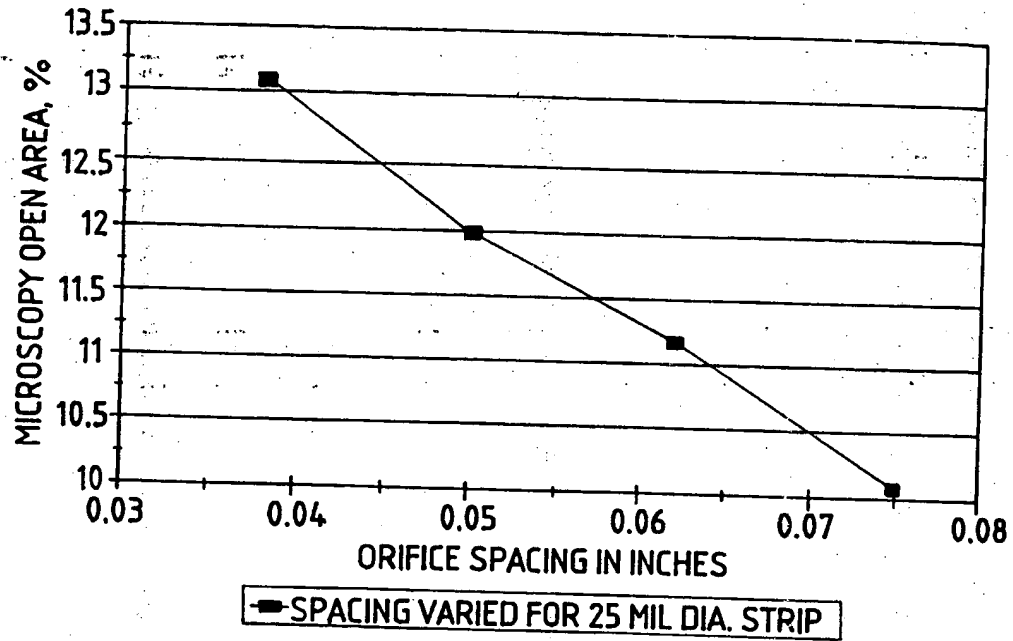

18/18

Fig. 26

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/US 96/13795

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61F13/00 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61F B26F A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,93 15701 (CHICOPEE) 19 August 1993 cited in the application see page 5, line 27 - page 6, line 15 see page 13, line 26 - line 32 see page 14, line 19 - page 15, line 19; claims ---	1-49
A	US,A,4 839 216 (CURRO JOHN J ET AL) 13 June 1989 cited in the application ---	
A	US,A,4 351 784 (THOMAS PAUL E ET AL) 28 September 1982 cited in the application -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

4 December 1996

Date of mailing of the international search report

17.12.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Soederberg, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 96/13795

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9315701	19-08-93	CA-A- 2130176	19-08-93
		CZ-A- 9401888	15-02-95
		NZ-A- 241650	24-02-95
		PT-A- 100137	29-04-94
		ZA-A- 9201169	18-08-93
		AU-A- 2244792	03-09-93
		BG-A- 98981	31-05-95
		BR-A- 9207080	05-12-95
		EP-A- 0626838	07-12-94
		FI-A- 943782	17-08-94
		JP-T- 8502215	12-03-96
		NO-A- 943036	16-08-94
		SK-A- 95294	12-04-95
US-A-4839216	13-06-89	US-A- 4695422	22-09-87
		AU-B- 581643	02-03-89
		AU-A- 3871685	22-08-85
		CA-A- 1239517	26-07-88
		CA-A- 1242062	20-09-88
		EP-A- 0156471	02-10-85
		GB-A,B 2154173	04-09-85
		GB-A,B 2184389	24-06-87
		GB-A,B 2184390	24-06-87
		GB-A,B 2184391	24-06-87
		HK-A- 58490	10-08-90
		HK-A- 59290	10-08-90
		HK-A- 59390	10-08-90
		HK-A- 59490	10-08-90
		JP-B- 6079828	12-10-94
		JP-A- 60242042	02-12-85
US-A-4351784	28-09-82	NONE	